



US009260907B2

(12) **United States Patent**
Nieminen et al.

(10) **Patent No.:** **US 9,260,907 B2**
(45) **Date of Patent:** **Feb. 16, 2016**

(54) **TRIPLE PANE WINDOW SPACER HAVING A SUNKEN INTERMEDIATE PANE**

(58) **Field of Classification Search**
CPC E06B 3/66342; E06B 3/66366; E06B 7/12
USPC 52/172, 204.593, 204.595, 786.1,
52/786.11, 786.13
See application file for complete search history.

(71) Applicant: **Guardian IGU, LLC**, White Bear Lake, MN (US)

(56) **References Cited**

(72) Inventors: **Raimo T. Nieminen**, Lempaala (FI); **Richard Ahnen**, Sparta, WI (US); **Paul Terpstra**, Janesville, WI (US); **David Rapp**, Eden Prairie, MN (US); **Eric B. Rapp**, Avoca, WI (US)

U.S. PATENT DOCUMENTS

32,436 A	5/1861	Scofield
367,236 A	7/1887	Reinghardt
423,704 A	3/1890	Simpson
1,310,206 A	7/1919	Mowat
2,235,680 A	3/1941	Haven et al.

(Continued)

(73) Assignee: **Guardian IG, LLC**, Sun Prairie, WI (US)

FOREIGN PATENT DOCUMENTS

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

CA	1290624	10/1991
CA	2757945	10/2010

(Continued)

(21) Appl. No.: **14/058,441**

OTHER PUBLICATIONS

(22) Filed: **Oct. 21, 2013**

““Edgetech I.G., Super Spacer® Cushion Edge™, Decorative Glass, Foam Space””, <http://www.edgetechig.com/SuperSpacer/CushionEdge.aspx> May 23, 2011 , 1 page.

(Continued)

(65) **Prior Publication Data**

US 2014/0109499 A1 Apr. 24, 2014

Primary Examiner — Adriana Figueroa

(74) *Attorney, Agent, or Firm* — Remarck Law Group PLC

Related U.S. Application Data

(57) **ABSTRACT**


(60) Provisional application No. 61/716,915, filed on Oct. 22, 2012.

In one embodiment, a window spacer has an outer elongate strip with a first surface and a second surface. The window spacer also has first and second inner elongate strips that each has a first surface and a second surface. The inner elongate strips are arranged so that each of the first surfaces of the inner elongate strips is spaced from the second surface of the outer elongate strip. The inner elongate strips are also spaced from each other to form an elongate intermediate pane gap. Support legs extend between the outer elongate strip and the two inner elongate strips.

(51) **Int. Cl.**
E06B 3/663 (2006.01)
E06B 7/12 (2006.01)

(52) **U.S. Cl.**
CPC **E06B 3/66342** (2013.01); **E06B 3/66366** (2013.01); **E06B 7/12** (2013.01)

20 Claims, 20 Drawing Sheets

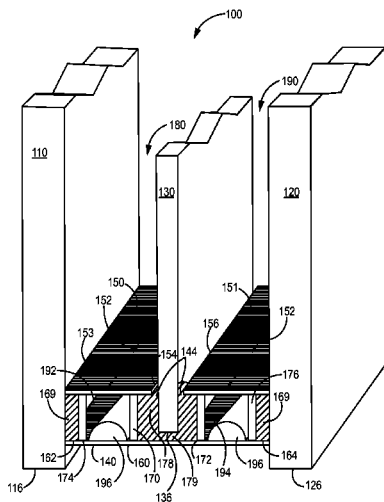

(56)

References Cited

U.S. PATENT DOCUMENTS

2,597,097	A	5/1952	Haven	5,182,931	A	2/1993	Noe et al.
2,618,819	A	11/1952	Goodwillie	5,209,034	A	5/1993	Box et al.
2,708,774	A	5/1955	Seelen	5,254,377	A	10/1993	Lingemann
2,885,746	A	5/1956	Güra	5,290,611	A	3/1994	Taylor
2,838,810	A	6/1958	Englehart et al.	5,295,292	A	3/1994	Leopold
3,027,608	A	4/1962	Ryan	5,302,425	A	4/1994	Taylor
3,045,297	A	7/1962	Ljungdahl	5,308,662	A	5/1994	Woodard et al.
3,143,009	A	8/1964	Pfeiffer	5,313,762	A	5/1994	Guillemet
3,280,523	A	10/1966	Stroud et al.	5,361,476	A	11/1994	Leopold
3,288,667	A	11/1966	Martin	5,377,473	A	1/1995	Narayan et al.
3,645,121	A	2/1972	Pfeiffer et al.	5,391,416	A	2/1995	Kunert
3,756,060	A	9/1973	Bindernagel	5,394,671	A	3/1995	Taylor
3,758,996	A	9/1973	Bowser	5,439,716	A	8/1995	Larsen
3,796,080	A	3/1974	Munchbach	5,441,779	A	8/1995	Lafond
3,839,137	A	10/1974	Davis et al.	5,443,871	A	8/1995	Lafond
3,872,198	A *	3/1975	Britton 264/46.6	5,461,840	A	10/1995	Taylor
3,875,706	A *	4/1975	Okawa 52/172	5,485,709	A	1/1996	Guillemet
3,921,359	A	11/1975	Brichard et al.	5,512,341	A	4/1996	Newby et al.
3,935,893	A	2/1976	Stang et al.	5,514,428	A	5/1996	Kunert
3,956,998	A	5/1976	Bavetz	5,531,047	A	7/1996	Leopold et al.
3,981,111	A	9/1976	Berthagen	5,553,440	A	9/1996	Bulger et al.
4,002,048	A	1/1977	Pozsgay	5,564,631	A	10/1996	Leopold
4,027,517	A	6/1977	Bodnar	5,567,258	A	10/1996	Lee et al.
4,057,944	A	11/1977	Wyatt et al.	5,568,714	A *	10/1996	Peterson 52/786.13
4,057,945	A	11/1977	Kessler	5,573,618	A	11/1996	Rueckheim
4,074,480	A	2/1978	Burton	5,581,971	A	12/1996	Peterson
4,080,482	A *	3/1978	Lacombe 428/34	5,601,677	A	2/1997	Leopold
4,098,722	A	7/1978	Cairns et al.	5,617,699	A *	4/1997	Thompson, Jr. 52/786.13
4,113,799	A	9/1978	Van Ornum et al.	5,630,306	A *	5/1997	Wylie 52/786.13
4,113,904	A	9/1978	Kiefer	5,644,894	A	7/1997	Hudson
4,113,905	A	9/1978	Kessler	5,655,282	A	8/1997	Hodek et al.
4,114,342	A	9/1978	Okawa	5,658,645	A	8/1997	Lafond
4,222,213	A	9/1980	Kessler	5,675,944	A	10/1997	Kerr et al.
4,226,063	A	10/1980	Chenel	5,679,419	A	10/1997	Larsen
4,241,146	A	12/1980	Sivachenko et al.	5,705,010	A	1/1998	Larsen
4,244,203	A	1/1981	Pryor et al.	5,714,214	A	2/1998	Larsen
4,382,375	A	5/1983	Yamamoto et al.	5,759,665	A	6/1998	Lafond
4,400,338	A	8/1983	Rundo	5,773,135	A	6/1998	Lafond
4,408,474	A	10/1983	Hutzenlaub et al.	5,775,393	A	7/1998	Kovacik
4,431,691	A	2/1984	Greenlee	5,813,191	A	9/1998	Gallagher
4,499,703	A	2/1985	Rundo	5,851,609	A	12/1998	Baratuci et al.
4,536,424	A	8/1985	Laurent	5,855,132	A	1/1999	Cozzi
4,551,364	A	11/1985	Davies	5,879,764	A	3/1999	Chu et al.
4,561,929	A	12/1985	Lenhardt	5,890,289	A	4/1999	Guillemet
4,563,843	A *	1/1986	Grether et al. 52/172	6,035,602	A	3/2000	Lafond
4,564,540	A *	1/1986	Davies et al. 428/34	6,038,825	A	3/2000	Shah et al.
4,567,710	A	2/1986	Reed	6,079,242	A	6/2000	Allegro et al.
4,576,841	A	3/1986	Lingemann	6,092,375	A	7/2000	Denniston
4,580,428	A	4/1986	Brettbacher et al.	6,109,084	A	8/2000	Hutzenlaub et al.
4,654,057	A	3/1987	Rhodes	6,115,989	A	9/2000	Boone
4,658,553	A	4/1987	Shinagawa	6,131,364	A	10/2000	Peterson
4,719,728	A	1/1988	Eriksson et al.	6,148,563	A *	11/2000	Roche et al. 49/501
4,720,950	A	1/1988	Bayer et al.	6,148,890	A	11/2000	LaFond
4,769,105	A	9/1988	Lisec	6,183,879	B1	2/2001	Deeley
4,780,164	A	10/1988	Rueckheim et al.	6,197,129	B1	3/2001	Zhu et al.
4,791,773	A	12/1988	Taylor	6,223,414	B1	5/2001	Hodek et al.
4,808,452	A	2/1989	McShane	6,250,026	B1	6/2001	Thompson, Jr.
4,815,245	A	3/1989	Gartner	6,266,940	B1 *	7/2001	Reichert 52/786.13
4,831,799	A	5/1989	Glover et al.	6,289,641	B1	9/2001	McCandless
4,835,130	A	5/1989	Box	6,295,788	B2 *	10/2001	Reichert 52/786.13
4,835,926	A	6/1989	King	6,339,909	B1 *	1/2002	Brunnhofer et al. 52/786.13
4,850,175	A	7/1989	Berdan	6,345,485	B1	2/2002	Boone
4,854,022	A	8/1989	Lisec	6,351,923	B1	3/2002	Peterson
4,862,666	A	9/1989	Kero	6,355,328	B1	3/2002	Baratuci et al.
4,866,967	A	9/1989	Sporenberg et al.	6,370,838	B1	4/2002	Evason
4,881,355	A	11/1989	Bosl et al.	6,415,561	B2	7/2002	Thompson, Jr.
5,052,164	A	10/1991	Sandow	6,477,812	B2	11/2002	Boone
5,079,054	A	1/1992	Davies	6,481,222	B1	11/2002	Denniston
5,080,146	A	1/1992	Arasteh	6,488,996	B1	12/2002	Ino et al.
5,087,489	A	2/1992	Lingemann	6,497,130	B2	12/2002	Nilsson
5,088,258	A	2/1992	Schild et al.	6,500,516	B2	12/2002	Bourlier
5,113,678	A	5/1992	Mannaka et al.	6,528,131	B1	3/2003	Lafond
5,120,584	A	6/1992	Ohlenforst et al.	6,581,341	B1	6/2003	Baratuci et al.
5,125,195	A *	6/1992	Brede 52/171.3	6,622,456	B2	9/2003	Almasy
5,167,756	A	12/1992	Lenhardt	6,686,002	B2	2/2004	Auerbach
				6,715,244	B2	4/2004	Boone
				6,796,102	B2	9/2004	Virnelson et al.
				6,823,644	B1 *	11/2004	Peterson 52/786.13
				6,877,292	B2	4/2005	Baratuci et al.

(56)

References Cited

U.S. PATENT DOCUMENTS

6,887,292 B2 5/2005 Thorwesten
 7,008,492 B2 3/2006 Lisec
 7,043,881 B2 5/2006 Krause, Sr. et al.
 7,107,729 B2 9/2006 Baratuci et al.
 7,132,151 B2 11/2006 Rasmussen
 7,347,909 B2 3/2008 Reichert
 7,445,682 B2 11/2008 James et al.
 7,448,246 B2 11/2008 Briese et al.
 7,827,761 B2 11/2010 Buchanan et al.
 7,856,791 B2* 12/2010 Rosskamp et al. 52/786.13
 7,938,924 B2 5/2011 Lisec
 8,025,941 B2 9/2011 Taylor et al.
 8,114,488 B2 2/2012 Alvarez
 8,151,542 B2* 4/2012 Trpkovski 52/786.13
 8,595,994 B1 12/2013 Grommesh
 2001/0001357 A1 5/2001 Reichert
 2001/0015037 A1 8/2001 Thompson
 2001/0032436 A1 10/2001 Riegelman
 2003/0041557 A1 3/2003 Trpkovski et al.
 2003/0074859 A1 4/2003 Reichert et al.
 2003/0097818 A1 5/2003 Almasy
 2003/0101664 A1 6/2003 Trpkovski
 2003/0178127 A1 9/2003 Lisec
 2005/0055901 A1 3/2005 Valentz et al.
 2005/0074566 A1 4/2005 Rouanet et al.
 2005/0166546 A1 8/2005 Reichert
 2005/0167028 A1 8/2005 Reichert
 2005/0178078 A1 8/2005 Valentz et al.
 2005/0227025 A1 10/2005 Baratuci et al.
 2006/0065345 A1 3/2006 James et al.
 2006/0101739 A1 5/2006 Baratuci et al.
 2006/0105158 A1 5/2006 Fritz et al.
 2006/0130427 A1 6/2006 Hodek et al.
 2006/0201606 A1 9/2006 Lisec
 2007/0077376 A1 4/2007 Mamiya et al.
 2007/0087140 A1 4/2007 Dierks
 2007/0116907 A1 5/2007 Landon et al.
 2007/0131338 A1 6/2007 Lisec
 2007/0160781 A1 7/2007 Landon et al.
 2007/0178256 A1 8/2007 Landon
 2007/0178257 A1 8/2007 Landon
 2008/0060290 A1 3/2008 McGlinchy et al.
 2009/0120018 A1 5/2009 Trpkovski
 2009/0120019 A1 5/2009 Trpkovski
 2009/0120035 A1 5/2009 Trpkovski
 2009/0120036 A1 5/2009 Trpkovski
 2009/0123694 A1 5/2009 Trpkovski
 2009/0223150 A1 9/2009 Baratuci et al.
 2009/0301637 A1 12/2009 Reichert
 2010/0065580 A1 3/2010 McGlinchy et al.
 2010/0200164 A1 8/2010 Lisec
 2010/0255224 A1 10/2010 Gubbels et al.
 2011/0104512 A1 5/2011 Rapp et al.
 2011/0303349 A1* 12/2011 Nieminen et al. 156/91
 2012/0151857 A1* 6/2012 Heikkila et al. 52/204.593
 2012/0177827 A1 7/2012 Trpkovski
 2013/0042552 A1 2/2013 Trpkovski et al.
 2013/0047404 A1 2/2013 Nieminen et al.

FOREIGN PATENT DOCUMENTS

DE 6903785 1/1969
 DE 1904907 6/1971
 DE 2452592 A1* 5/1976
 DE 2613946 A1* 10/1977
 DE 3529434 2/1986
 DE 102010005181 A1* 7/2011
 EP 0054251 6/1982
 EP 78530 A2* 5/1983 E06B 3/66
 EP 0113209 7/1983
 EP 113209 A2* 7/1984 E06B 3/66
 EP 0 268 886 6/1988
 EP 0 403 058 12/1990
 EP 2177703 4/2010

FR 2 525 314 10/1983
 GB 1508778 4/1978
 GB 1579726 11/1980
 GB 2 181 773 4/1987
 WO WO-93/25774 12/1993
 WO WO-03101709 12/2003
 WO WO-2004009944 1/2004
 WO WO-2009064905 5/2009
 WO WO-2009064909 5/2009
 WO WO-2009064915 5/2009
 WO WO-2009064919 5/2009
 WO WO-2009064921 5/2009
 WO WO-2011008860 1/2011
 WO WO-2011156722 12/2011

OTHER PUBLICATIONS

Unknown, "Insulating Glass Production", Glass Digest May 15, 1994, 4 pages.
 "Replacement Window Spacers: The Swiggle Spacer System", <http://www.replacement-windows.com/spacers-swiggle-system.php> (downloaded from web site Oct. 10, 2011) 2 pages.
 Unknown, "Allmetal—Making windows more exciting.", Allmetal Catalog Pages from the 1990's., 2 pages.
 "File History for co-pending, co-owned U.S. Appl. No. 12/270,289", Entitled "Reinforced Window Spacer," Filed on Nov. 13, 2008 (300 pages).
 "File History for co-pending, co-owned U.S. Appl. No. 12/270,362", Entitled "Sealed Unit and Spacer With Stabilized Elongate Strip," Filed on Nov. 13, 2008 (190 pages).
 "File History for co-pending, co-owned U.S. Appl. No. 12/270,393", Entitled "Material with Undulating Shape," Filed on Nov. 13, 2008 (203 pages).
 "File History for co-pending, co-owned U.S. Appl. No. 13/326,501", Entitled "Triple Pane Window Spacer, Window Assembly and Methods for Manufacturing Same," Filed on Dec. 15, 2011 (211 pages).
 "Intercept® Spacer Technologies: Your Best Answer to Energy Star™ and EN-1279, GED Integrated Solutions,," <http://www.gedusa.com/intercept.php> (Jun. 28, 2011 9:08:36 AM), 2 pages.
 "PCT Notification Concerning Transmittal of International Preliminary Report on Patentability", from International Application No. PCT/US2008/083441, corresponding to U.S. Appl. No. 12/270,289, issued on May 18, 2010, pp. 1-8.
 "PCT Notification Concerning Transmittal of International Preliminary Report on Patentability", from International Application No. PCT/US2008/083449, corresponding to U.S. Appl. No. 12/270,362), issued on May 18, 2010, pp. 1-7.
 "PCT Notification Concerning Transmittal of International Preliminary Report on Patentability", from International Application No. PCT/US2008/083435, corresponding to U.S. Appl. No. 12/270,393, issued on May 18, 2010, pp. 1-6.
 "PCT Notification Concerning Transmittal of International Preliminary Report on Patentability", from International Application No. PCT/US2011/065470, corresponding to U.S. Appl. No. 13/326,501, issued on Jun. 18, 2013, pp. 1-9.
 PCT International Search Report and Written Opinion from co-owned, co-pending, International Application No. PCT/US2008083441, corresponding to U.S. Appl. No. 12/270,289, mailed Jan. 22, 2009, pp. 1-10.
 PCT International Search Report and Written Opinion from co-owned, co-pending, International Application No. PCT/US2008083449, corresponding to U.S. Appl. No. 12/270,362, mailed Jan. 22, 2009, pp. 1-8.
 PCT International Search Report and Written Opinion from co-owned, co-pending, International Application No. PCT/US2008083435, corresponding to U.S. Appl. No. 12/270,393, mailed Jan. 22, 2009, pp. 1-7.
 PCT International Search Report and Written Opinion from co-owned, co-pending, International Application No. PCT/US2011065470, corresponding to U.S. Appl. No. 13/326,501, mailed May 7, 2012, pp. 1-13.
 PCT International Search Report and Written Opinion from co-owned, co-pending, International Application No. PCT/US2013/066177, corresponding to U.S. Appl. No. 14/058,441, mailed Dec 11, 2013, pp. 1-14.

(56)

References Cited

OTHER PUBLICATIONS

Figures from AT379860 (1 page).

Figures from DE1259823 (2 pages).

Translated Abstract and Figures for CH630993A5 (2 pages).

Translated Abstract and Figures for DE19642669 (4 pages).

Translated Abstract and Figures for DE20200349 (2 pages).

Translated Abstract and Figures for DE4101277 (13 pages).

Translated Abstract and Figures for EP0139262 (3 pages).

Translated Abstract and Figures for EP0078530 (5 pages).

Translated Abstract and Figures for EP0500483 (3 pages).

Translated Abstract and Figures for FR2744165 (3 pages).

Translated Abstract and Figures for WO03074830 (5 pages).

Translated Description and Figures for DE10011759 (5 pages).

Translated Description and Figures for DE2152071 (3 pages).

Translated Description and Figures for WO2010094446 (19 pages).

* cited by examiner

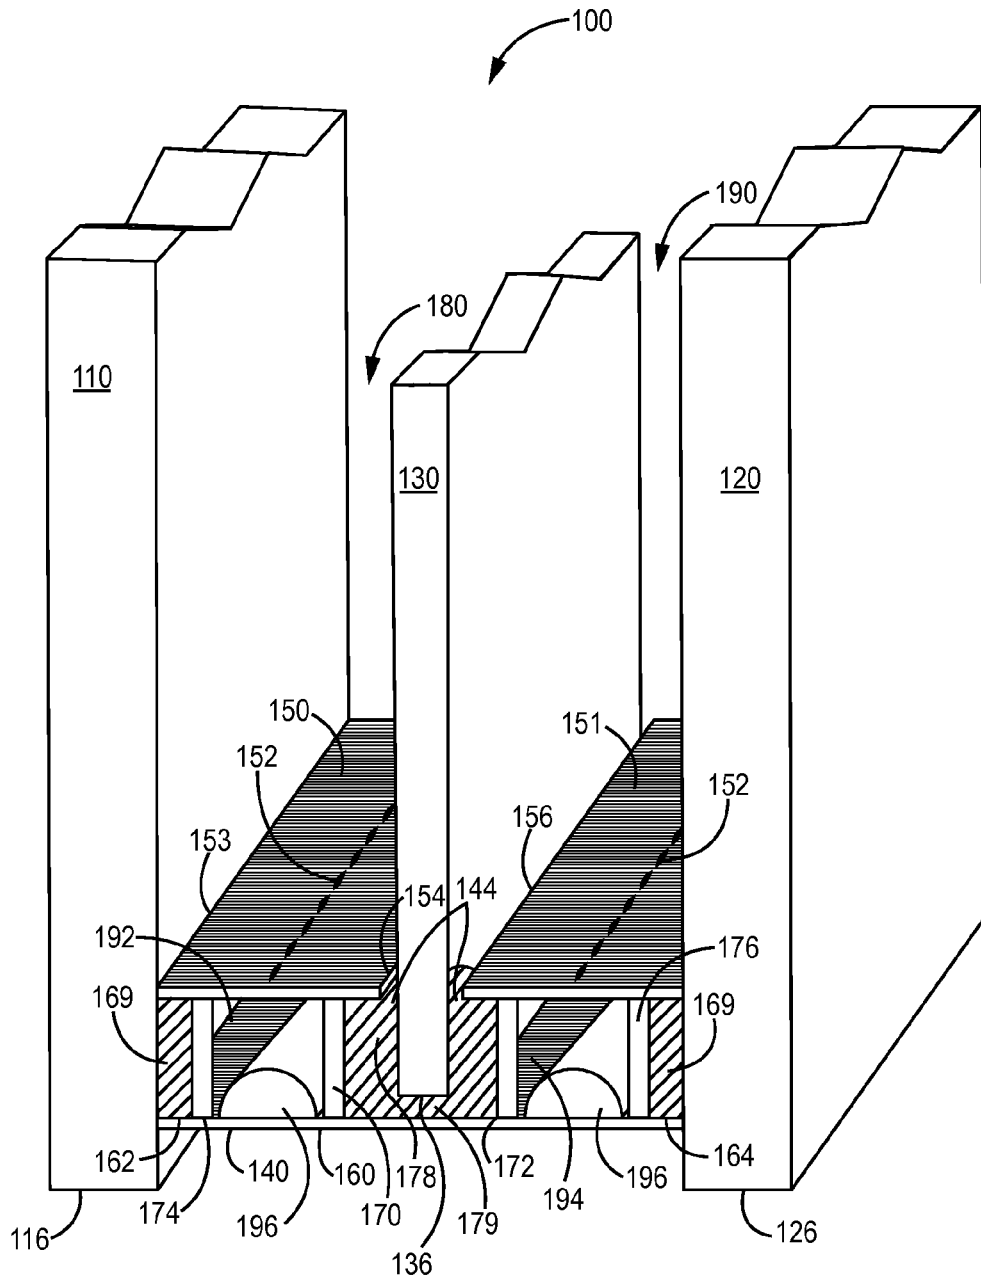


FIG. 1

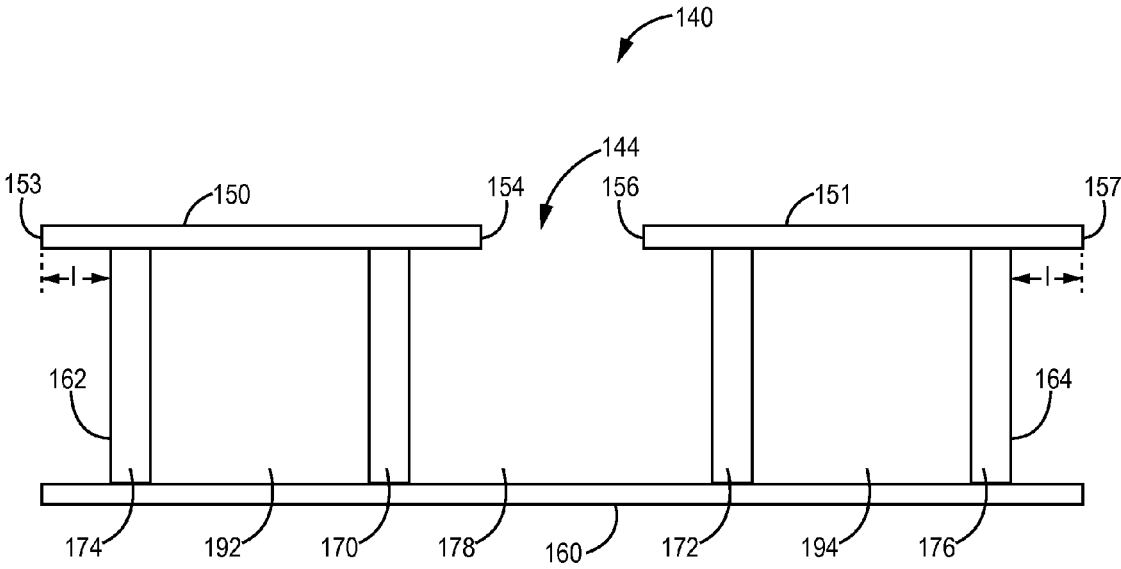


FIG. 2

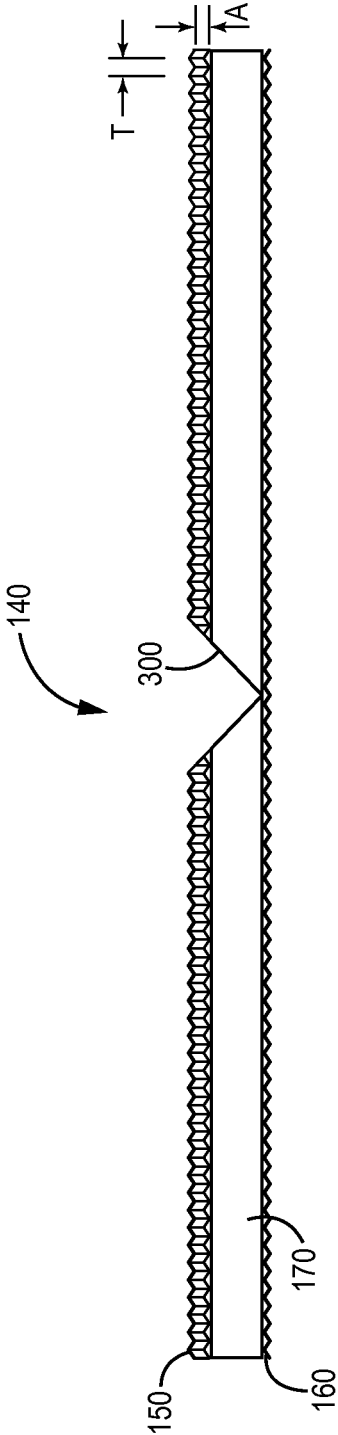


FIG. 3

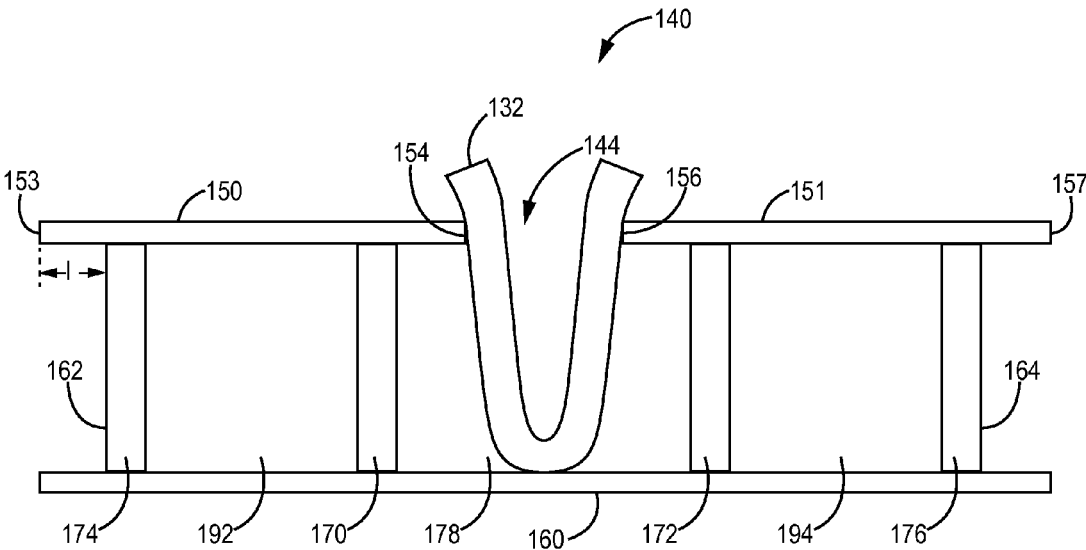


FIG. 4

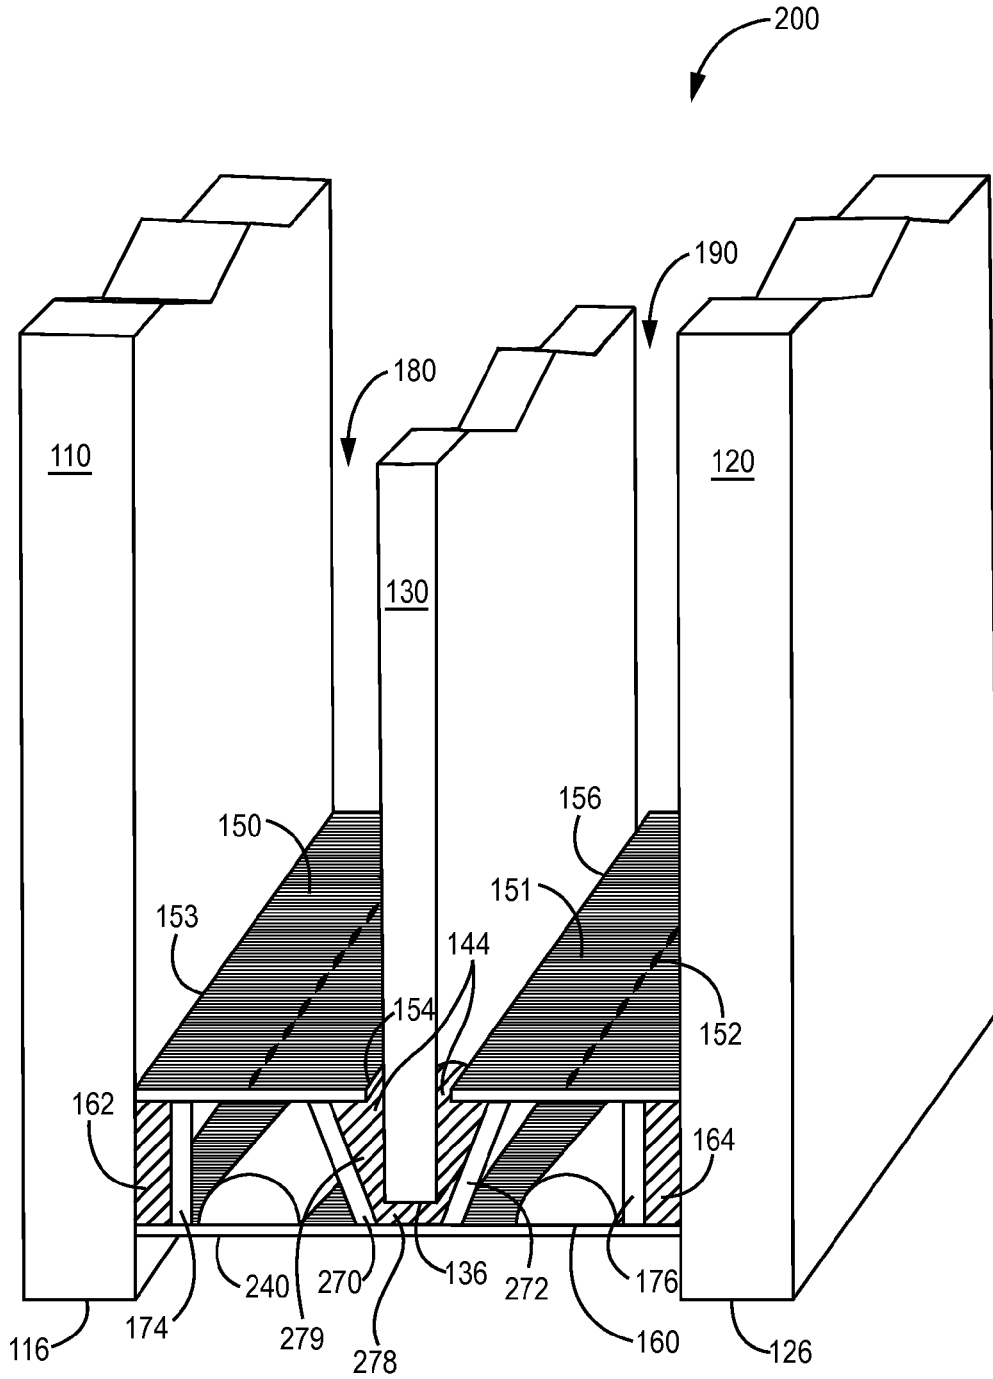


FIG. 5

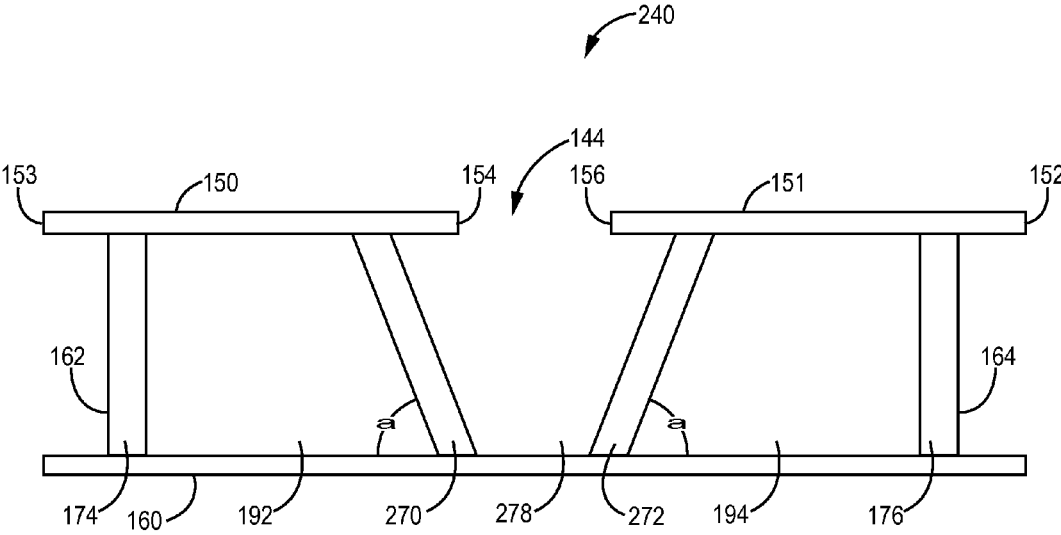


FIG. 6

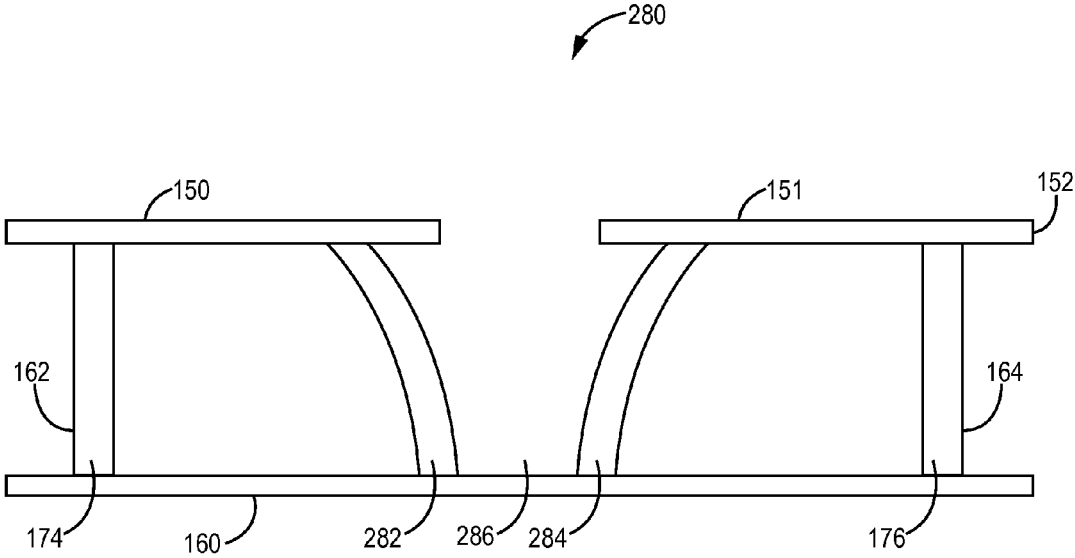


FIG. 6A

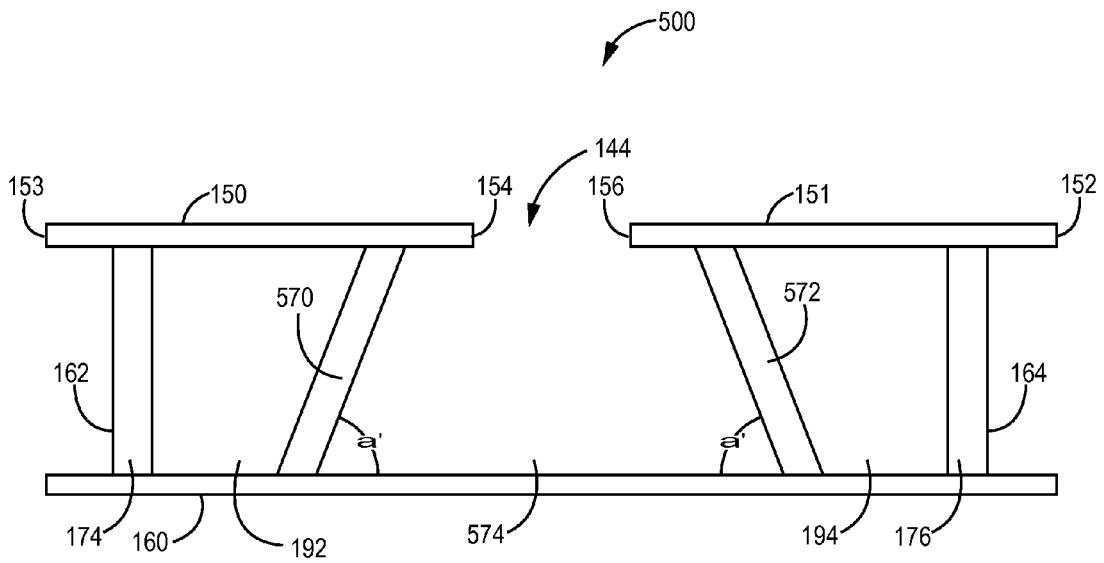


FIG. 7

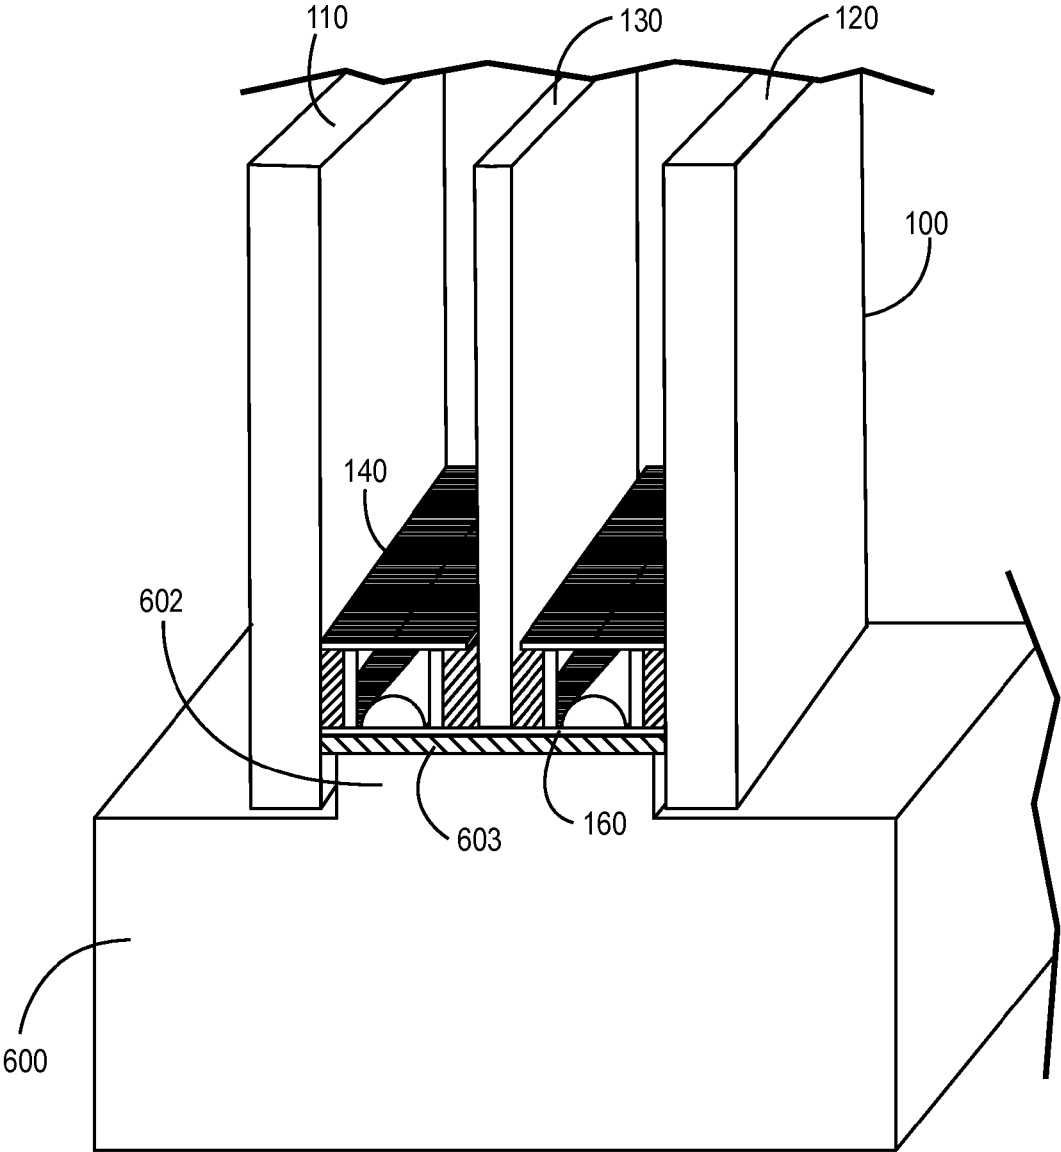


FIG. 8

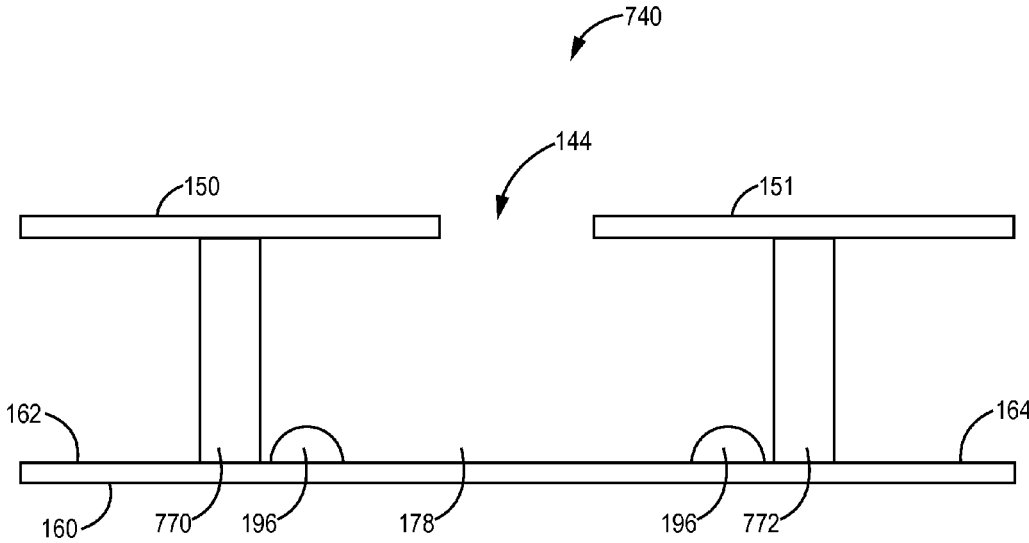


FIG. 9

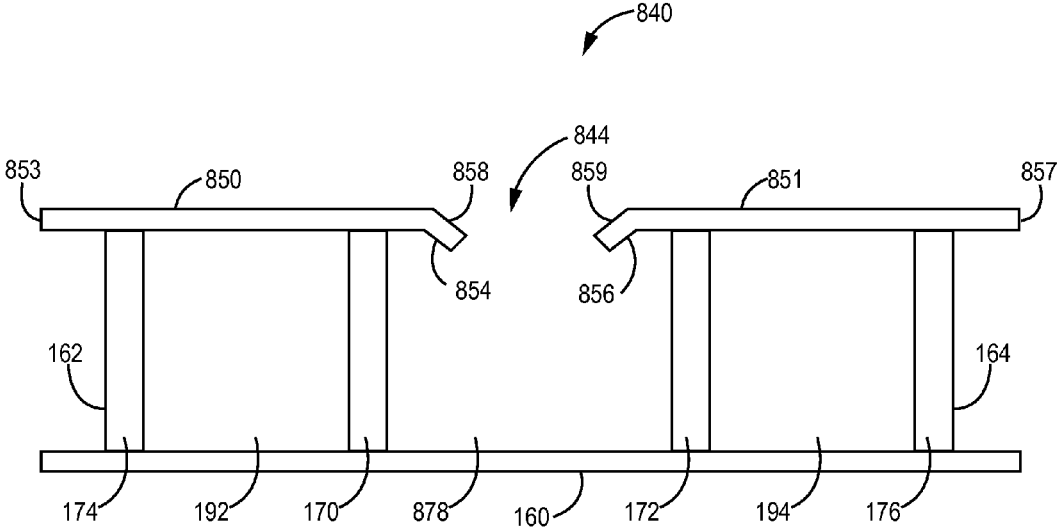


FIG. 10

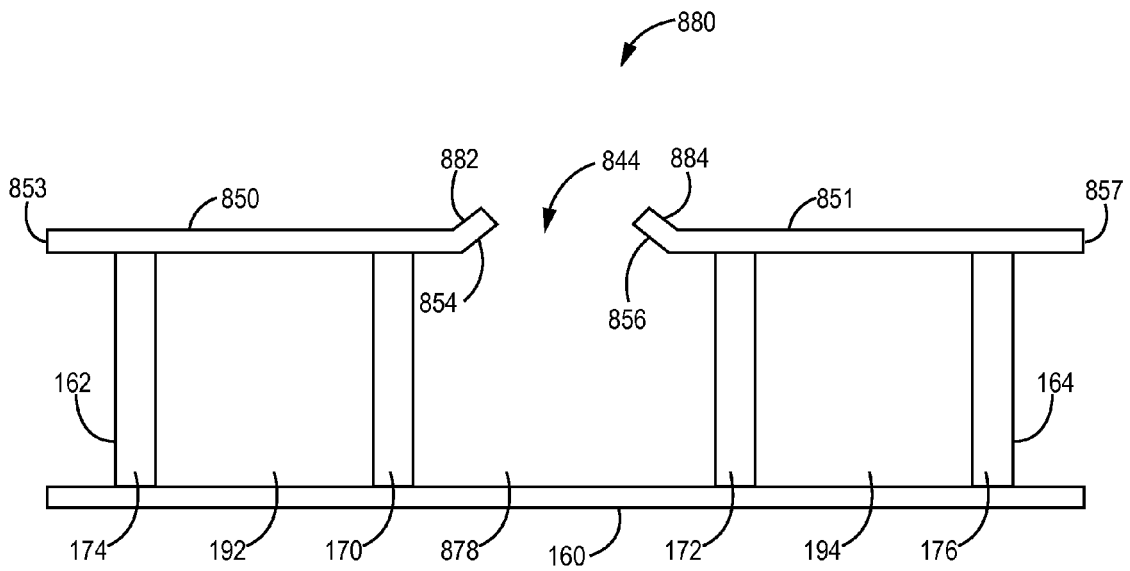


FIG. 11

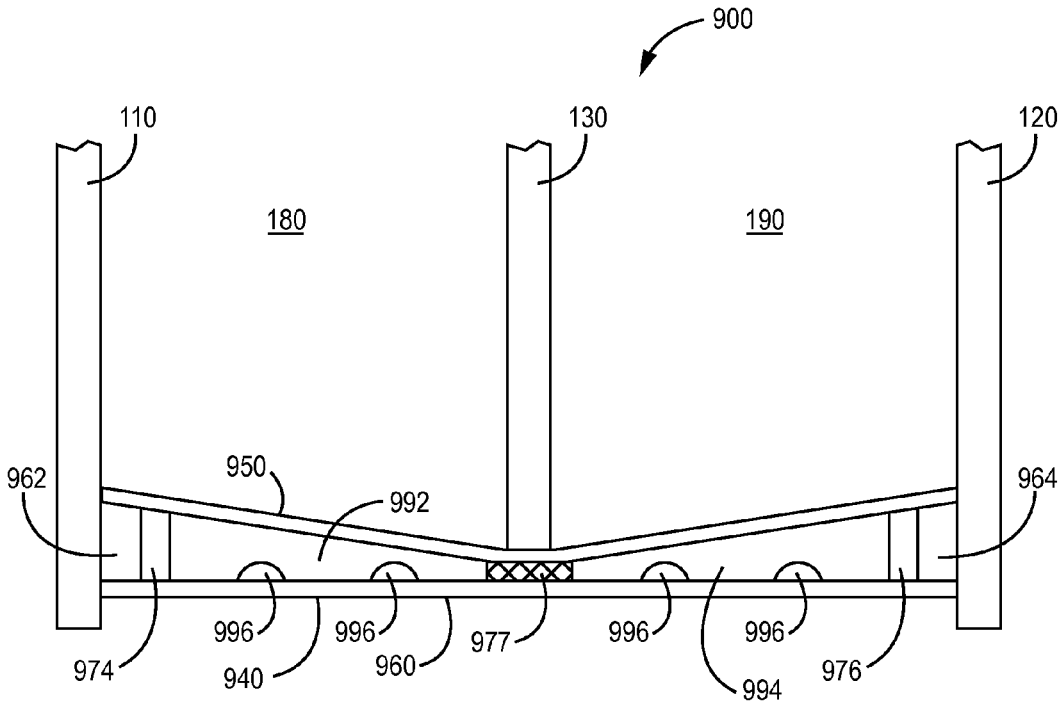


FIG. 12

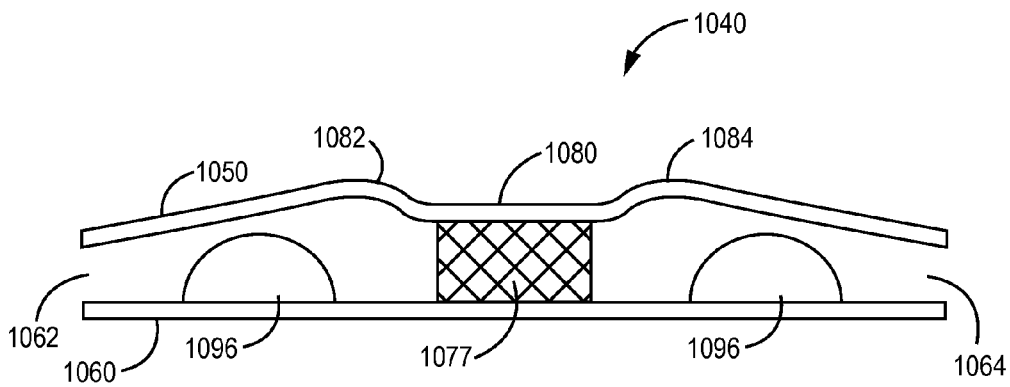


FIG. 13

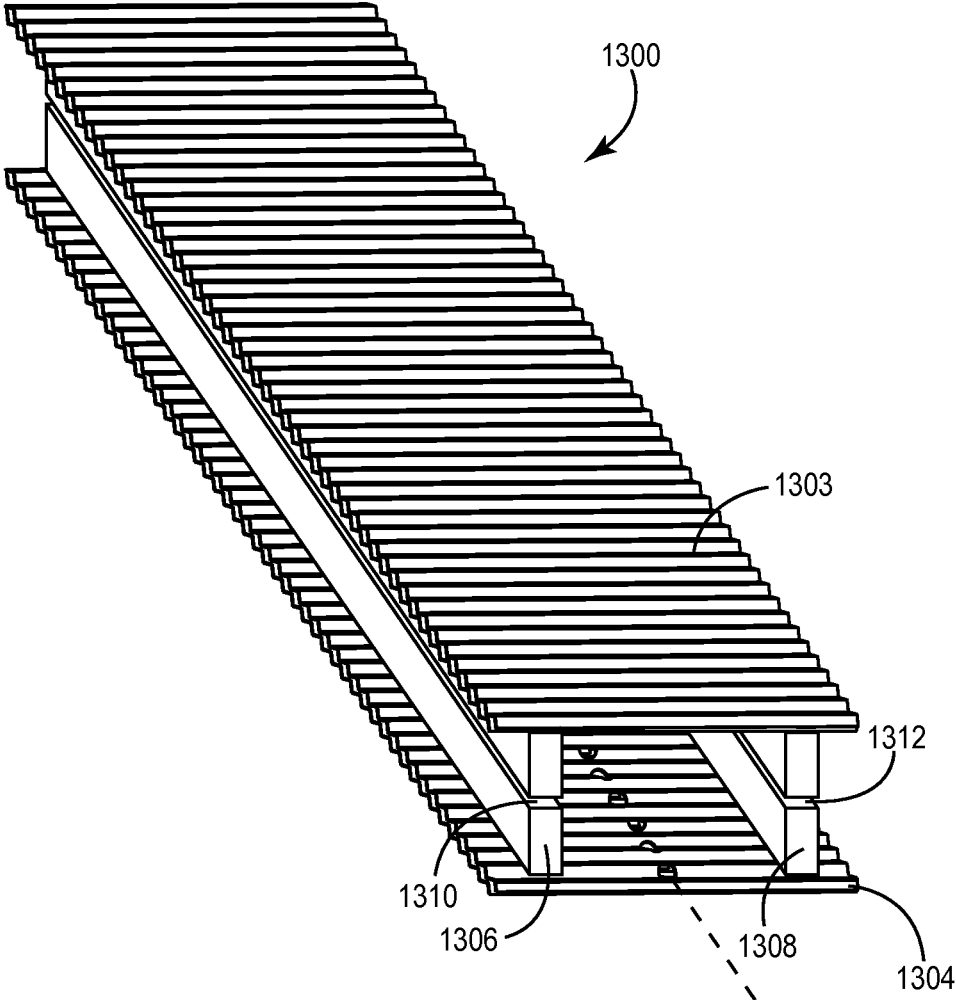


FIG. 14

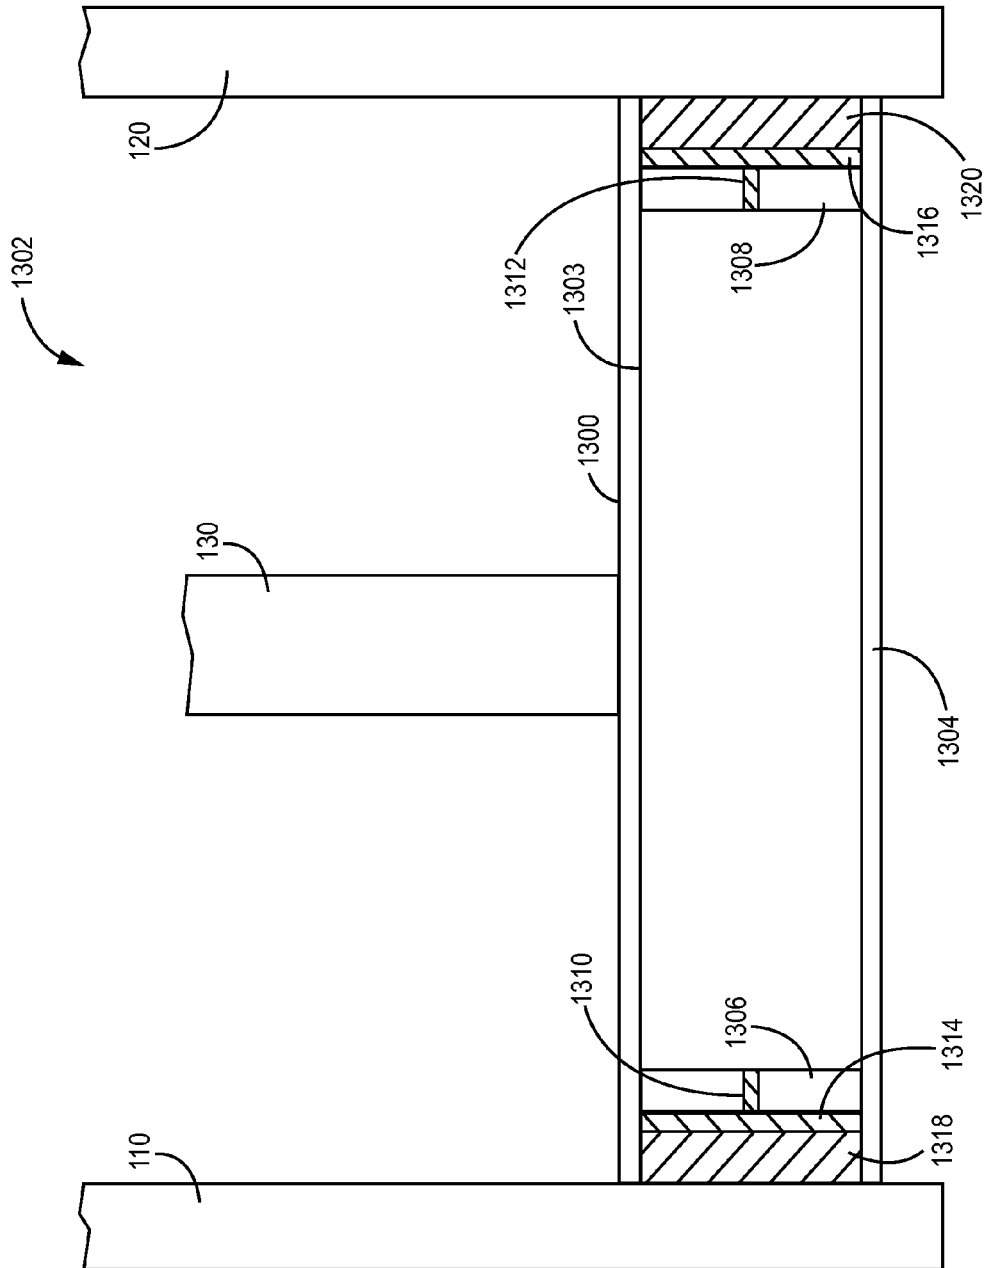


FIG. 15

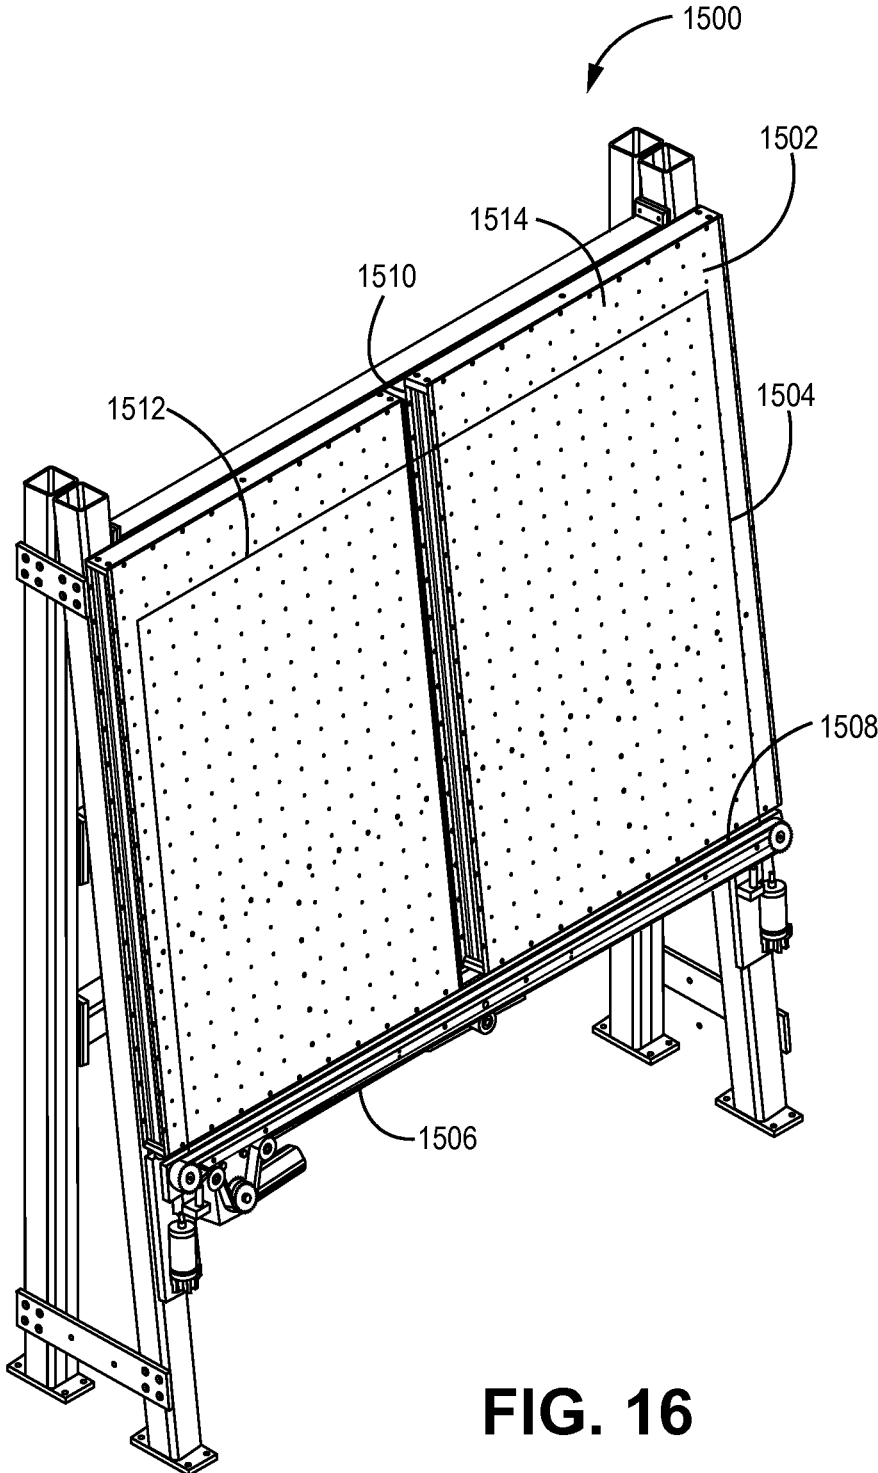


FIG. 16

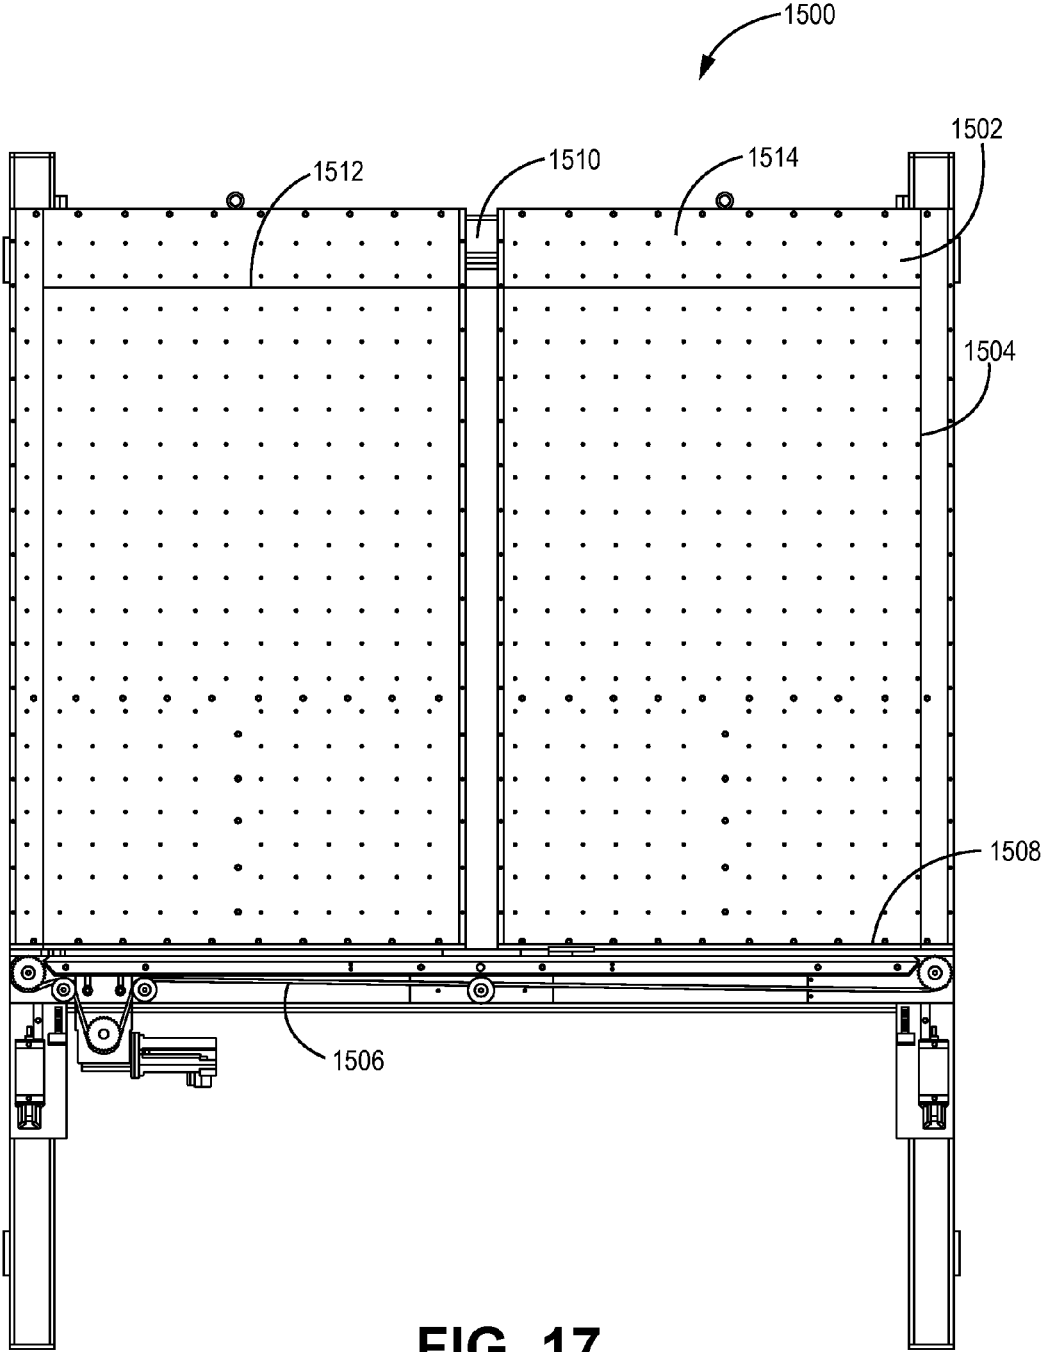


FIG. 17

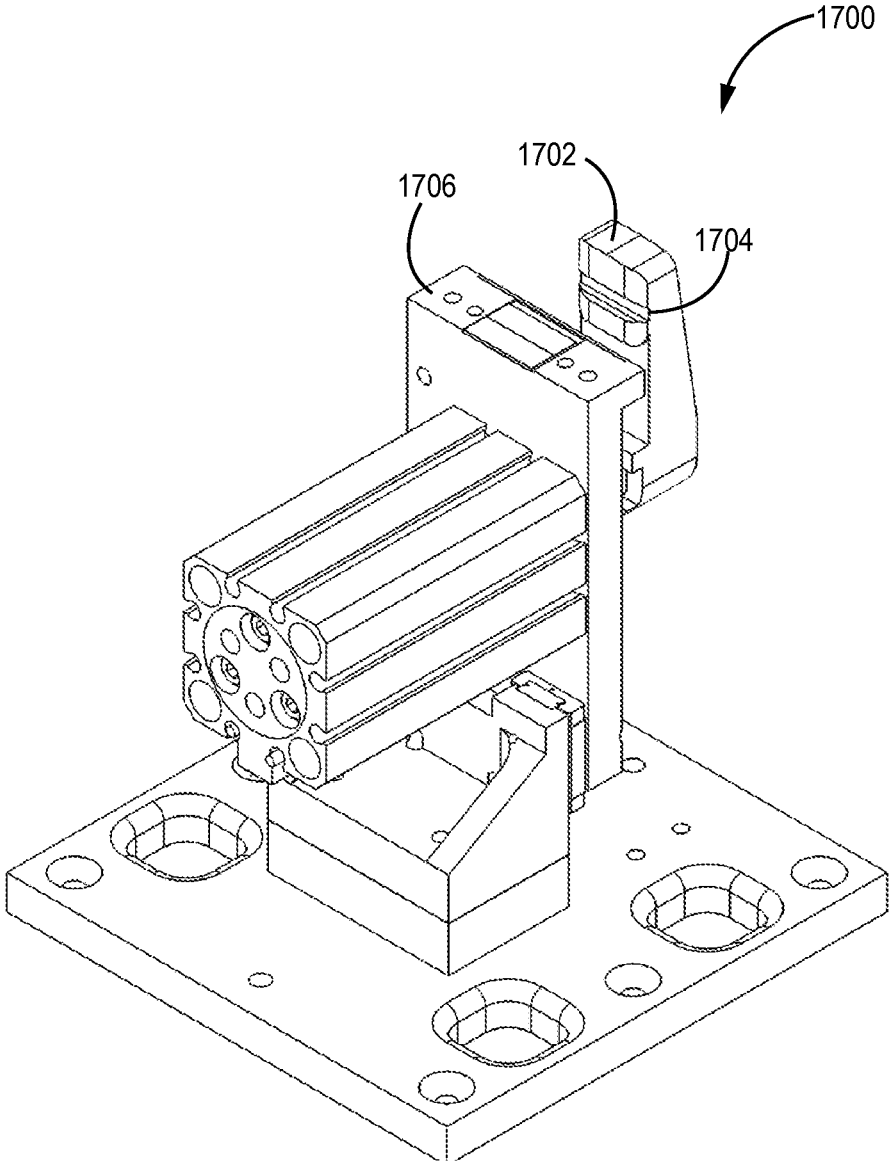


FIG. 18

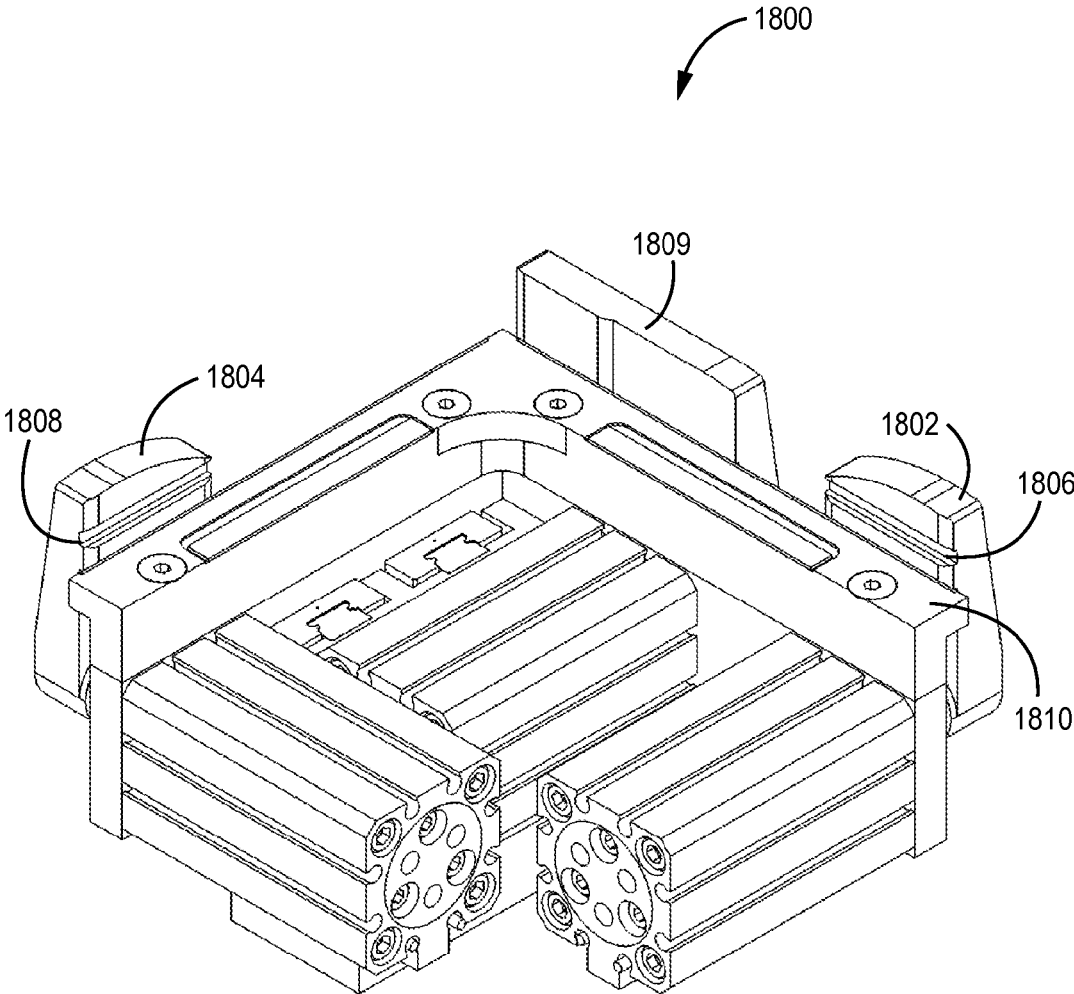


FIG. 19

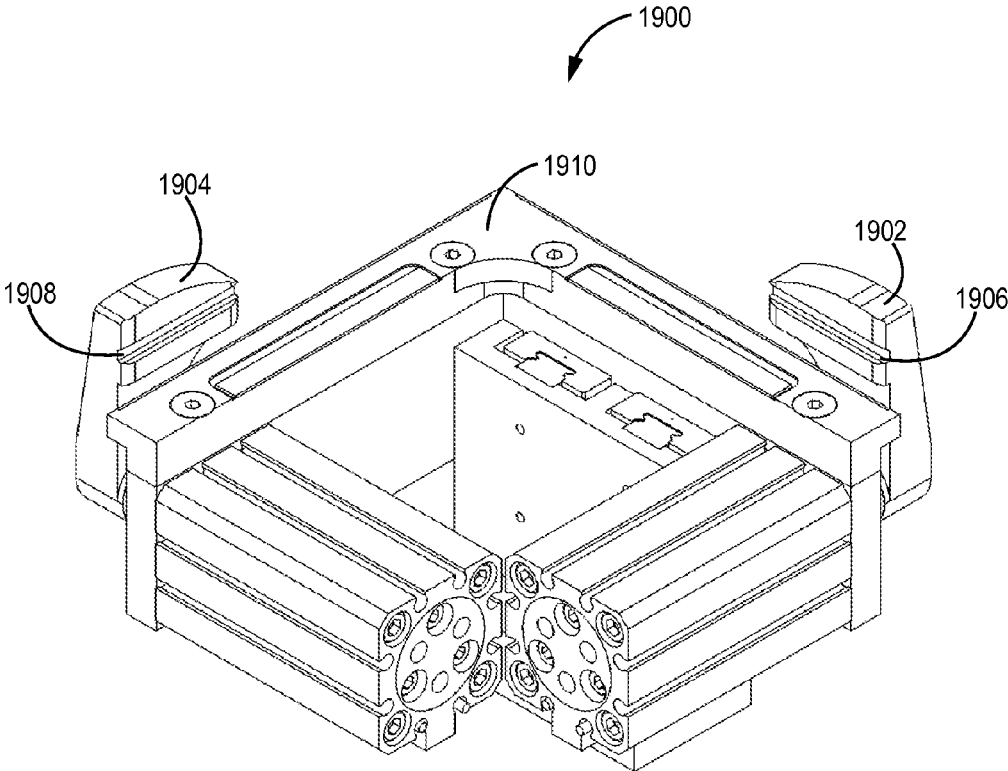


FIG. 20

TRIPLE PANE WINDOW SPACER HAVING A SUNKEN INTERMEDIATE PANE

RELATED APPLICATIONS

This application is a non-provisional of “TRIPLE PANE WINDOW SPACER HAVING A SUNKEN INTERMEDIATE PANE,” U.S. 61/716,915, filed Oct. 22, 2012, which is incorporated herein by reference.

This application is related to the following U.S. patent applications “TRIPLE PANE WINDOW SPACER, WINDOW ASSEMBLY AND METHODS FOR MANUFACTURING SAME”, U.S. 2012/0151857, filed Dec. 15, 2011 ; “SEALED UNIT AND SPACER”, U.S. 2009/0120035, filed Nov. 13, 2008 ; “BOX SPACER WITH SIDEWALLS”, U.S. 2009/0120036, filed Nov. 13, 2008 ; “REINFORCED WINDOW SPACER”, U.S. 2009/0120019, filed Nov. 13, 2008 ; “SEALED UNIT AND SPACER WITH STABILIZED ELONGATE STRIP”, U.S. 2009/0120018, filed Nov. 13, 2008 ; “MATERIAL WITH UNDULATING SHAPE” U.S. 2009/0123694, filed Nov. 13, 2008 ; and “STRETCHED STRIPS FOR SPACER AND SEALED UNIT”, U.S. 2011/0104512, filed Jul. 14, 2010 ; “WINDOW SPACER APPLICATOR”, U.S. 2011/0303349, filed Jun. 10, 2011 ; “WINDOW SPACER, WINDOW ASSEMBLY AND METHODS FOR MANUFACTURING SAME”, U.S. Provisional Patent Application Ser. No. 61/386,732, filed Sep. 27, 2010 ; “SPACER JOINT STRUCTURE”, US-2013-0042552-A1, filed on Oct. 22, 2012 ; “ROTATING SPACER APPLICATOR FOR WINDOW ASSEMBLY”, US 2013/0047404, filed on Oct. 22, 2012 ; “SPACER HAVING A DESICCANT”, filed on Oct. 22, 2012 ; and “ASSEMBLY EQUIPMENT LINE AND METHOD FOR WINDOWS”, filed on Oct. 21, 2013 ; which are all hereby incorporated by reference in their entireties.

FIELD OF TECHNOLOGY

The technology disclosed herein is generally related to window spacers. More particularly, the technology disclosed herein is related to a window spacers and window assemblies having a sunken intermediate pane.

BACKGROUND

Windows often include two or more facing panes of glass or other material separated by an air space. The air space reduces heat transfer through the window to insulate the interior of a building to which it is attached from external temperature variations. As a result, the energy efficiency of the building is improved, and a more even temperature distribution is achieved within the building.

SUMMARY

The technology disclosed herein generally relates to window spacers. In one embodiment, a window spacer has an outer elongate strip with a first surface and a second surface. The window spacer also has first and second inner elongate strips that each has a first surface and a second surface. The inner elongate strips are arranged so that each of the first surfaces of the inner elongate strips is spaced from the second surface of the outer elongate strip. The inner elongate strips are also spaced from each other to form an elongate intermediate pane gap. A first outer support leg extends between the outer elongate strip and the first inner elongate strip, and a second outer support leg extends between the outer elongate

strip and the second inner elongate strip. A first inner support leg extends between the outer elongate strip and the first inner elongate strip, positioned between the two outer support legs. A second inner support leg extends between the outer elongate strip and the second inner elongate strip, positioned between the two outer support legs.

The technology disclosed herein also relates to window assemblies. In one embodiment a window unit has a first, second and intermediate pane, and a spacer, where the spacer has an outer elongate strip and first and second inner elongate strips, each having a first surface and a second surface. The inner elongate strips are arranged so that each of the first surfaces of the inner elongate strips are spaced from the second surface of the outer elongate strip, and the inner elongate strips are spaced from each other to form an elongate intermediate pane gap. A first outer support leg extends between the outer elongate strip and the first inner elongate strip, and a second outer support leg extends between the outer elongate strip and the second inner elongate strip. A first inner support leg extends between the outer elongate strip and the first inner elongate strip, where the first inner support leg is positioned between the two outer support legs. Further, a second inner support leg extends between the outer elongate strip and the second inner elongate strip, where the second inner support leg is also positioned between the two outer support legs. In such an embodiment the spacer extends from the first pane to the second pane, and the spacer supports the intermediate pane on the outer elongate strip. The spacer defines a first sealant cavity having sealant between the first pane and the first outer support leg, and a second sealant cavity having sealant between the second pane and the second outer support leg.

In yet another embodiment a window unit has first pane, a second pane and an intermediate pane that is disposed between the first pane and the second pane. The window unit also has a spacer. The spacer has an outer elongate strip, a first inner elongate strip, and a second inner elongate strip. The outer elongate strip extends from the first pane to the second pane, and the first inner elongate strip extends from the first pane to the intermediate pane. The second inner elongate strip extends from the intermediate pane to the second pane. A first support leg extends between the outer elongate strip and the first inner elongate strip, and a second support leg extending between the outer elongate strip and the second inner elongate strip.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 depicts a partial perspective, cross-sectional view of one implementation of a window assembly described herein.

FIG. 2 depicts a cross-sectional view of a spacer component of FIG. 1, consistent with the technology disclosed herein.

FIG. 3 depicts a side view of a portion of the spacer component of FIGS. 1 and 2, consistent with the technology disclosed herein.

FIG. 4 depicts a cross-sectional view of another spacer component consistent with the technology disclosed herein.

FIG. 5 depicts a partial perspective, cross-sectional view of another implementation of a window assembly described herein.

FIG. 6 depicts a cross-sectional view of a spacer component of FIG. 5, consistent with the technology disclosed herein.

FIG. 6A depicts a cross-sectional view of another embodiment of a spacer.

3

FIG. 7 depicts a cross-sectional view of yet another embodiment of a spacer.

FIG. 8 depicts a setting block used to assist with handling triple pane window assemblies.

FIGS. 9 to 13 depicts cross-sectional views of further implementations of a spacer component.

FIG. 14 depicts a perspective view of yet another spacer embodiment.

FIG. 15 depicts a cross-sectional view of a window unit incorporating the spacer of FIG. 13.

FIGS. 16-17 depict perspective and front views, respectively of a spacer set conveyor embodiment.

FIGS. 18-20 depict examples of pane retention elements.

DETAILED DESCRIPTION OF PARTICULAR EMBODIMENTS

Triple pane window assemblies having an inner pane, outer pane and intermediate pane between the inner and outer panes are valued for providing increased insulation values compared to double pane window assemblies. Triple pane window assemblies consistent with the present disclosure include a spacer structure that can secure the intermediate pane while also establishing the spacing of the inner and outer panes.

In some existing designs for triple pane window assemblies, two separate spacers are used between each adjacent pair of panes. These types of arrangements require that four separate seals be formed between the interior air cavities of the window and the exterior environment. In contrast, in window unit designs where a single spacer structure extends between the two outer panes, only two separate seals are required.

In some existing designs for triple pane spacers where a single spacer structure extends between the two outer panes, an air gap is present adjacent to the outer perimeter edge of the intermediate pane. In other existing designs of this type for triple pane spacers, only foam supports the intermediate pane. In these situations, there is sometimes a concern that the weight of the intermediate pane may result in compressing or crushing the spacer in the center. The likelihood of such a result increases as the size of the window assembly, and therefore the weight of the intermediate pane, increases. In many of the spacer embodiments depicted herein, the intermediate pane is supported by an outer elongate strip of a spacer or by a solid structure that is in contact with the outer elongate strip. As a result, the concern about the intermediate pane crushing the spacer structure is eliminated.

Flexibility and twistability can be desirable in a spacer design, and can facilitate reeling of lengths of the spacer and other manufacturing techniques. Many of the spacers described herein have two separate inner elongate strips defining a gap between them instead of a solid single elongate strip. As a result of this type of design and other features described herein, the design has increased flexibility and twistability.

Another concern sometimes associated with triple pane window assemblies is relevant to reflections off of the perimeter edge of the intermediate pane. Sometimes light can reflect off of the outer edge of the intermediate pane in ways that are undesirable. If the outer perimeter of the intermediate pane is not visible to someone viewing the window assembly, then the possibility of undesirable reflections is significantly reduced or eliminated. In many of the spacer embodiments depicted herein, the outer perimeter of the intermediate pane is positioned within the spacer structure and is not visible. As

4

a result, the possibility of undesirable reflections is significantly reduced in window assemblies using these spacer designs.

FIG. 1 depicts a partial cross-sectional view of one implementation of a spacer incorporated in a triple pane window assembly, consistent with the technology disclosed herein. FIG. 2 depicts a cross-sectional view of the spacer shown in FIG. 1.

Window assembly 100 includes a first sheet 110, a second sheet 120, an intermediate sheet 130 and a spacer 140 disposed between and extending between the first sheet 110 and the second sheet 120. FIG. 1 is a partial view of the window assembly 100 and depicts the spacer 140 contacting the inner-facing surfaces of the first and second sheets 110, 120 adjacent to the bottom perimeters 116, 126 of the first sheet 110 and second sheet 120. It should be understood that the first sheet 110, second sheet 120 and intermediate sheet 130 are window panes in a variety of embodiments. In some embodiments the first sheet 110, second sheet 120 and intermediate sheet 130 are panes of glass, and in other embodiments the first sheet 110, second sheet 120 and intermediate sheet 130 are constructed of other at least partially transparent materials. It should also be understood that the spacer 140 is an elongate structure that is disposed between the first sheet 110 and the second sheet 120 and extends adjacently to the entire perimeters of the sheets 110, 120. A perimeter 136 of the intermediate sheet 130 is in contact with the spacer 140.

Spacer 140 is generally structured to withstand compressive forces applied to the first sheet 110 and/or the second sheet 120 to maintain a desired space between the sheets 110, 120, 130. A first air space 180 is defined within window assembly 100 by the spacer 140, the first sheet 110 and the intermediate sheet 130. A second air space 190 is defined within the window assembly 100 by the spacer 140, the second sheet 120, and the intermediate sheet 130.

The spacer 140 includes two inner elongate strips 150 and 151 and an outer elongate strip 160 spaced from the two inner elongate strips 150 and 151. The terms inner and outer in the names for these parts relates to the fact that, after the window unit is assembled, the outer elongate strip 160 is closer to the outer perimeter of the window assembly than the inner elongate strips 150, 151. Focusing first on the two inner elongate strips 150 and 151, a first inner elongate strip 150 is spaced from a second inner elongate strip by an elongate intermediate pane gap 144, which accommodates the thickness of the intermediate sheet 130. The two inner elongate strips 150 and 151 each define apertures 152. The first inner elongate strip 150 has an outer elongate edge 153 and an inner elongate edge 154. The second inner elongate strip 151 has an outer elongate edge 157 (visible in FIG. 2 but not in FIG. 1) and an inner elongate edge 156.

The elongate intermediate gap 144 is defined between the inner edge 154 of the first inner elongate strip 150 and the inner edge 156 of the second inner elongate strip 151. In some embodiments, the intermediate gap 144 will be wider than the thickness of the intermediate sheet 130 so that the inner edges 154, 156 will not be directly in contact with the intermediate sheet 130. In some embodiments, the inner edges 154, 157 will be spaced from the intermediate sheet 130 by about 0.020 in. (about 0.50 mm) or more.

The first and second inner elongate strips 150, 151 are spaced apart from and face the outer elongate strip 160. Four support legs 170, 172, 174 and 176 extend between the inner elongate strips 150, 151 and the outer elongate strip 160 and establish the spacing there-between. A first inner support leg 170 and a second inner support leg 172 are located near to the

intermediate gap **144**. A first outer support leg **174** and a second outer support leg **176** are located closer to the outer elongate edges **153**, **152**.

The two inner support legs **170**, **172** define an intermediate cavity **178** between them, where the outer perimeter **136** of the intermediate sheet **130** rests. The intermediate cavity **178** is also partially bounded by portions of the two inner elongate strips **150**, **151** and the outer elongate strip **160**. The intermediate cavity **178** contains sealant **179**, shown in FIG. **1**. The sealant **179** is present between the perimeter **136** of the intermediate sheet **130** and the outer elongate strip **160**, and serves to seal the spacer **140** to the intermediate sheet **130**. As illustrated in FIG. **1**, the sealant **179** extends toward the two inner support legs **170**, **172**. In some embodiments, the sealant **179** fills most of the intermediate cavity **178**. In some embodiments, the sealant **179** fills the entire intermediate cavity **178**. In some embodiments, the sealant **179** contacts one or both of the inner elongate strips **150**, **151**. In some embodiments, the sealant **179** is present between the intermediate sheet **130** and the inner edges **154**, **156** of the inner elongate strips **150**, **151**, which can reduce the likelihood of noise caused by contact between the inner edges **154**, **156** and the intermediate sheet **130**. The presence of sealant **179** in most or all of the cavity **178** can also reduce the likelihood of reflections coming from the perimeter edge **136**.

During the assembly of the window unit **100**, the intermediate cavity **178** of the spacer **140** can serve as a registration structure which can be used to keep the spacer centered on the equipment and assist with proper placement and positioning of the intermediate sheet **130**.

The support legs **170**, **172**, **174**, **176** are also elongate and provide a uniform or substantially uniform spacing between inner elongate strips **150**, **151** and outer elongate strip **160**, maintaining the strips in a parallel or substantially parallel orientation. In some embodiments, the support legs **170**, **172**, **174**, **176** are substantially parallel to each other. In some embodiments, some of the support legs are angled. The support legs are substantially continuous in multiple embodiments and are arranged at intermediate positions between parallel elongate edges of the elongate strips. In a variety of embodiments, the support legs are constructed of nylon, although those having skill in the art will appreciate other materials that would also be suitable. In one embodiment, the support legs are constructed of a material having mechanical properties so that the support legs can withstand compressive forces and assist with maintaining the desired rigidity of the spacer. The support legs maintain the substantially parallel orientation of the elongate strips during the window assembly process and to some degree in the finished window assembly.

As visible in FIGS. **1** and **2**, sealant channels **162**, **164** are defined between the elongate edges of the spacer **140** and the outer support legs **174**, **176**. Generally the channels **162**, **164** are inset from the edges of the spacer **140**. A first sealant channel **162** is also bounded by the first sheet **110** when the window assembly is assembled. A second sealant channel **164** is bounded by the second sheet **120** when the window assembly is assembled. Sealant **169** present in the sealant channels **162**, **164** seals the spacer **140** to the first sheet **110** and the second sheet **120**, respectively. The material of the sealant **169** can be similar to or different than the sealant **179** within the intermediate cavity **178**.

The inset distance **I** of the support legs **174**, **176**, shown in FIG. **2**, defines the width of the sealant channels **162**, **164**. In some embodiments, the inset distance **I** is 0.01 inch (0.25 mm) or more. In one embodiment, the inset distance is 0.1 inch (2.54 mm) or less. In other embodiments, the inset distance **I** is 0.035 inch (0.89 mm) or more, 0.04 inch (1.02 mm)

or more, and 0.07 inch (1.78 mm) or more. In the specific embodiment illustrated in the FIGS. **1** and **2**, the inset distance **I** is about 0.075 inch (1.9 mm). In another embodiment, the inset distance **I** is about 0.0375 inch (0.95 mm). Sealant or adhesive generally occupies the channels **162**, **164** so that the sealant or adhesive thickness is typically the same thickness as the inset distance **I**. In different embodiments, the sealant or adhesive thickness is 0.08 inch (1.03 mm) or more, 0.5 inch (12.7 mm) or less, and about 0.175 inch (4.4 mm).

Sealant **169** is generally deposited within the channels **162**, **164** when assembling the window assembly **100** so that gas and liquid are inhibited from entering the space disposed between the first and second sheets **110**, **120**. It is also possible for a non-sealant adhesive material to be deposited in the channels. In some embodiments, sealant is formed of a material having adhesive properties, such that the sealant acts to fasten the spacer **140** to at least the first sheet **110** and the second sheet **120**. The material in each channel **162**, **164** contacts the inner faces of the first and second inner elongate strips and the inner face of the outer elongate strip in some embodiments, as well as contacts the inner face of the adjacent sheet **110** or **120**, and the adjacent outer support leg **174**, **176**. Typically, the material is arranged to support the spacer **140** in an orientation normal to inner faces of the first and second sheets **110**, **120**. If sealant is used, it also acts to seal the joint formed between the spacer **140** and the sheets **110**, **120** to inhibit gas or liquid intrusion into the first air space **180** or the second air space **190**. Examples of sealants include polyisobutylene (PIB), butyl rubber, curable PIB, silicone, adhesive for example acrylic adhesives; sealant for example acrylic sealants; and other Dual Seal Equivalent (DSE) type materials.

During one embodiment of an assembly method of a window unit, sealant or adhesive is placed in the intermediate channel **178** and in the outer sealant channels **162**, **164**. The intermediate sheet **130**, spacer **140**, or both are manipulated in order to wrap the spacer **140** around the perimeter edge **136** of the intermediate sheet **130**. The first and second sheets **110**, **120** are brought into contact with the elongate edges of the spacer **140**. During this step, the sealant or adhesive is under some pressure. This pressure helps to strengthen the bond between the sealant or adhesive material and the first and second sheets **110**, **120**. Another effect of the pressure is that the material typically spills out of the sealant channels **162**, **164** slightly, thereby contacting the top and bottom surfaces of the elongate edges of the spacer **140** and providing a barrier at the juncture of the spacer **140** and the first and second sheets **110**, **120**. Such contact is not required in all embodiments. However, the additional contact area between material and the spacer **140** can be beneficial. For example, the additional contact area increases adhesion strength. As will be described in more detail herein, in a variety of embodiments the elongate strips **150**, **151**, **160** define undulations. Such undulations of the elongate strips **150**, **151**, **160** also aid in improving the adhesion with the material. Further details regarding embodiments of the assembly process and applicator apparatus will be described herein, and are also described in U.S. patent application Ser. No. 13/157,866, "WINDOW SPACER APPLICATOR", filed Jun. 10, 2011 .

Two filler cavities **192**, **194** are defined by the spacer structure and include filler **196**. A first filler cavity **192** is defined between the first outer support leg **174** and the first inner support leg **170**. A second filler cavity **194** is defined between the second inner support leg **172** and the second outer support leg **176**. The filler cavities **192**, **194** are also bounded by inner

elongate strips **150**, **151** and the outer elongate strip **160**. Filler material **196** is present in each of the filler cavities **192**, **194**.

In the embodiments shown in the drawings, the filler **196** is located on the outer elongate strip **160**. In other embodiments, a bead of filler is located on an inner elongate strip or both of the inner elongate strips **150**, **151**. In one embodiment, the bead of filler on one or both of the inner elongate strips does not overlap with the openings **152**.

FIG. 4 depicts a cross sectional view of an alternate spacer component consistent with the technology disclosed herein, where like reference numbers are used for like parts. Similar to FIG. 2, the spacer has a first inner elongate strip **150** defining a first inner elongate edge **154** and a second inner elongate strip **151** defining a second inner elongate edge **156**. An intermediate pane gap **144** is additionally defined by an elongate gasket **132** sealably disposed between the first inner elongate edge **154** and the second inner elongate edge **156**. The elongate gasket **132** engages the first inner elongate edge **154** and the second inner elongate edge **156** and defines the intermediate pane gap **144** from outside the intermediate cavity **178** to inside the intermediate cavity **178**. The elongate gasket **132** is generally configured to provide a frictional fit with an intermediate sheet, such that the elongate gasket **132** is compressed between the intermediate sheet and the first inner elongate edge **154** and compressed between the intermediate sheet and the second inner elongate edge **156**. The elongate gasket **132** can also be configured to prevent contact between the inner elongate strips **150**, **151** and an intermediate sheet. The elongate gasket **132** can also be configured to secure an intermediate sheet to prevent shifting of the intermediate sheet relative to the spacer **140**.

The elongate gasket **132** can be a compressible material in a variety of embodiments. In a variety of embodiments the elongate gasket **132** is an extruded material. In at least one embodiment the elongate gasket **132** is a UV-curable material. In one embodiment, the elongate gasket **132** is polyisobutene (PIB). In some embodiments the elongate gasket **132** is extruded between the first inner elongate strip **150** and the second inner elongate strip **151**. In some other embodiments the elongate gasket **132** is extruded or molded separately and then inserted between the first inner elongate edge **154** and the second inner elongate edge **156**. In one embodiment, however, an elongate gasket is disposed about the perimeter of an intermediate sheet and then placed between the first inner elongate strip and the second inner elongate strip. In some embodiments, two or more elongate gaskets are incrementally disposed along the length of the spacer or, alternatively, about the perimeter of the intermediate sheet.

An alternative embodiment of a triple pane window assembly **200** and spacer **240** is illustrated in FIGS. 5 and 6. The window assembly **200** is identical to the window assembly **100** except that a different spacer **240** is used. Like reference numbers are used for like parts in the window assembly and spacer drawings. The spacer **240** has angled inner support legs **270** and **272** rather than the inner support legs **170** and **172** that are substantially perpendicular to the elongate strips in spacer **140** of FIGS. 1 and 2. The ends of the support legs **270**, **272** that contact the outer elongate strip **160** are closer together than the ends of the support legs **270**, **272** that contact the inner elongate strips **150**, **151**. The angled inner support legs **270**, **272** are boundaries for the intermediate cavity **278**. As a result of the angle of the inner support legs **270**, **272**, the cavity **278** has a smaller volume and therefore requires less sealant **279**. During assembly of the window assembly **200**, the angled support legs **270**, **272** may serve to guide the

intermediate sheet **130** into the correct position in contact with the outer elongate strip **160**.

As illustrated in FIG. 6, an angle α is defined between each of the angled support legs **270**, **272** and the portions of the outer elongate strip **160** that are closer to the outer edges of the spacer **240**. In one embodiment, the angle α is about 65 to 70 degrees. In one embodiment, the angle α is about 60 to 75 degrees.

FIG. 6A illustrates another alternative embodiment **280** of a spacer, which has many similarities and shared reference numbers with the other spacer embodiments. Spacer **280** has angled inner support legs **282** and **284** which are bowed inwardly. The ends of the support legs **282**, **284** that contact the outer elongate strip **160** are closer together than the ends of the support legs **282**, **284** that contact the inner elongate strips **150**, **151**. The angle of the inner support legs **282** and **284** can be similar or different than that discussed for the embodiment of FIG. 6. During assembly of a window assembly, the angled support legs **282**, **284** may serve to guide an intermediate pane into the correct position in contact with the outer elongate strip **160**.

FIG. 7 illustrates another alternative embodiment **500** of a spacer, which again has many similarities and shared reference numbers with the other spacer embodiments. Spacer **500** has inner support legs **570** and **572** which are angled in an opposite direction compared to the inner support legs of FIG. 6. The ends of the support legs **570**, **572** that contact the inner elongate strips **150**, **151** are closer together than the ends of the support legs **570**, **572** that contact the outer elongate strip **160**.

As illustrated in FIG. 7, an angle α' is defined between each of the angled support legs **570**, **572** and the portions of the outer elongate strip **160** within the intermediate cavity **574**. In one embodiment, the angle α' is about 65 to 70 degrees. In one embodiment, the angle α' is about 60 to 75 degrees.

FIG. 8 is a cross-sectional view of a small portion of the window unit **100** being supported on a structure **600** that includes a ridge **602**. The ridge **602** protrudes into the space between outer panes **110**, **120** to support the outer elongate strip **160** of the spacer, which is in turn supporting the intermediate sheet **130**. Sash structures, frame structures and other structures that incorporate the window unit **100** may incorporate such a support structure **600** in order to provide support to the intermediate sheet **130**. As the size of the window unit **100** increases, the support provided by the support structure **600** becomes more desirable. A secondary sealant **603** may be present at the outer perimeter of the spacer **140** along the outer elongate strip **160**.

An alternative embodiment of a spacer **740** for a triple pane window assembly is illustrated in FIG. 9. In many ways, the components of the spacer **740** in FIG. 9 are identical to the spacer **140** of FIGS. 1 and 2, and like reference numbers are used for like parts in the spacer drawings. One difference is that spacer **740** employs two support legs, a first support leg **770** and a second support leg **772**, rather than four support legs. The support legs **770**, **772** of spacer **740** can be wider in one embodiment than the support legs **170**, **172**, **174**, **176** of spacer **140** of FIGS. 1 and 2. In one example, the support legs **770**, **772** have a thickness of about 0.050 inch, while the support legs **170**, **172**, **174**, **176** have a thickness of about 0.030 inch. Filler **196** is located in an intermediate cavity **178** defined between the two support legs **770**, **772** and between the inner elongate strips **150**, **151** and the outer elongate strip **160**. In one embodiment, two strands of filler **196** are located in the intermediate cavity **178**.

An alternative spacer **840** is shown in FIG. 10. Spacer **840** is identical to spacer **140** in FIGS. 1 and 2 in many ways, and

like reference numbers are used for like parts. The difference between spacer **840** and spacer **140** is that spacer **840** includes two inner elongate strips **850**, **851** which each have an angled portion **858**, **859** at an inner edge **854**, **856**. The angled portion **858**, **859** of each inner elongate strip **850**, **851** slopes toward the outer elongate strip **160**, while the remainder of each inner elongate strip **850**, **851** is substantially parallel to the outer elongate strip **160**. An intermediate cavity **878** is defined between the inner elongate strips **850**, **851** and the outer elongate strip **160**. The intermediate cavity **878** is also defined by the two inner support legs **170**, **172**. As discussed with respect to the embodiments of FIGS. **1** and **2**, sealant is placed in the intermediate cavity **878** and the sealant serves to secure an intermediate pane to the outer elongate strip **160** of the spacer **840**. The angled portions **858**, **859** help to retain sealant within the intermediate cavity **878**.

An alternative spacer **880** is shown in FIG. **11**, which is mostly identical to spacer **840** of FIG. **10**. However, in contrast to spacer **840** of FIG. **10**, the spacer **880** of FIG. **11** has angled portions **882**, **884** that are angled upwardly away from the outer elongate strip **160**.

FIG. **12** illustrates an alternative triple pane window assembly **900** that uses an alternative spacer **940**. Like reference numbers are used to refer to like parts compared to other Figures. The window assembly **900** includes a first sheet **110**, a second sheet **120** and an intermediate sheet **130**. Like window assembly **100** of FIG. **1**, the spacer **940** includes an outer elongate strip **960**. The spacer **940** also includes a single inner elongate strip **950**.

The inner and outer elongate strips **950**, **960** are spaced from each other and are connected to each other by a structural element **977**. Examples of materials that can be used for the structural element are thermoplastic materials that have sufficient structural properties such as rigidity to support the intermediate sheet **130**. In some embodiments, the structural element **977** also incorporates a desiccant. In some embodiments, the structural element is capable of forming a seal. One specific example of a suitable material that has sufficient rigidity, is capable of forming a seal and incorporates a desiccant is Koedimelt Thermo Plastic Spacer material sold by Koemmerling Chemische Fabrik GmbH of Pirmasens, Germany.

In one embodiment, the material of the structural element **977** can be extruded into position on the inner **950** or outer elongate strip **960**. The structural element **977** has a thickness extending from the inner to the outer elongate strip of about 0.050 to 0.200 inch in some embodiments, or about 0.150 to 0.200 inch in some embodiments. The structural element **977** has a width that is about the same or larger than the thickness of the intermediate sheet **130** in some embodiments.

The intermediate sheet **130** contacts the inner elongate strip **950** at the location where the inner elongate strip **950** is supported by and is in contact with the structural element **977**. As a result, the spacer **940** is not crushed at that location. In some embodiments, sealant, adhesive or adhesive tape is used to secure the intermediate sheet **130** to the inner elongate strip **950**.

The elongate strips **950**, **960** both have an undulating shape that extends across the width of each strip, as discussed in more detail herein, in some embodiments, or may have a portion of planar, non-undulating material in the center of each strip where each strip contacts the structural element **977** in some embodiments. In one embodiment, the outer elongate strip **960** has undulations across the entire width and the inner elongate strip **950** has undulations except for a planar center portion. In one embodiment, the inner elongate strip **950** has

undulations across the entire width and the outer elongate strip **960** has undulations except for a planar center portion.

In some embodiments, the spacer **940** includes a first support leg **974** and a second support leg **976**. In some embodiments, the spacer **940** does not include any support legs. Spacer **940** embodiments without any support legs will have increased flexibility and twistability compared to embodiments with support legs, which can be an advantage during reeling of lengths of spacer and other manufacturing steps. The presence of the support legs **974**, **976** in some embodiments provides a backstop surface for sealant placed in sealant cavities **962**, **964**, and therefore allows the window unit to be assembled with a lower volume of sealant being used in the sealant cavities.

The spacer **940** defines two filler cavities **992**, **994** between the elongate strips **950**, **960**. A first filler cavity **992** is defined between the structural element **977** and the first support leg **974**, if present, or the first sheet **110**. A second filler cavity **994** is defined between the structural element **977** and the second support leg **976**, if present, or the second sheet **120**. Filler **996** is present in the filler cavities in some embodiments. In one embodiment, two strands of filler **996** are present in each of the filler cavities as illustrated in FIG. **12**. In one embodiment, one strand of filler **996** is present in each filler cavity.

An alternative spacer embodiment **1040** for a triple pane window assembly is illustrated in FIG. **13**. An inner elongate strip **1050** faces an outer elongate strip **1060**, and they are connected by a structural element **1077**. Examples of materials that can be used for the structural element **1077** are thermoplastic materials.

In one embodiment, the material of the structural element **1077** can be extruded into position on the inner elongate strip **1050** or outer elongate strip **1060**. The structural element **1077** has a thickness extending from the inner elongate strip **1050** to the outer elongate strip **1060** of about 0.050 to 0.300 inches in some embodiments, or about 0.200 to 0.300 inch in some embodiments. The structural element **1077** has a width that is about the same or larger than the thickness of an intermediate pane in some embodiments.

When the spacer **1040** is used in a triple pane window assembly, an intermediate pane will contact the inner elongate strip **1050** at an intermediate pane location **1080** where the inner elongate strip **1050** is supported by and in contact with the structural element **1077**. As a result, the spacer **1040** is not crushed at that location by the weight of the intermediate pane. In some embodiments, sealant, adhesive or adhesive tape is used to secure the intermediate pane to the inner elongate strip **1050**.

The inner elongate strip **1050** is structured so that the intermediate pane location **1080** is notched downward between the adjacent raised portions **1082**, **1084**. The notch structure of the intermediate pane location **1080** can be helpful in serving as a registration structure for locating the intermediate pane. Sealant channels **1062**, **1064** are defined at the edges of the spacer **1040**.

In one embodiment, consistent with a spacer having support legs, the outer support legs are slit and then reconnected with a sealant. In one embodiment, one of the outer support legs is slit and then reconnected with a sealant. A slitting step improves the flexibility and twistability of the spacer. FIG. **14** shows a spacer **1300** having two split support legs and FIG. **15** shows the spacer **1300** incorporated into a window unit **1302**. The spacer **1300** includes an inner elongate strip **1303** and an outer elongate strip **1304**, with two support legs **1306**, **1308** extending between the elongate strips **1303**, **1304**. The support legs **1306**, **1308** each define a slit **1310**, **1312**, respectively. In one embodiment, the slits **1310**, **1312** are located

11

near about the midpoint of one or more of the support legs **1306**, **1308**. In other embodiments, each slit is located at other locations along one or more of the support legs. The use of a slit in the outer support legs could be used in conjunction with any of the spacers described herein, and is not limited to the spacer **1300**, of FIGS. **14** and **15**.

Now referring to FIG. **15**, a cross section of a portion of a window unit **1302** is shown, incorporating a spacer **1300** with split outer support legs. A cutting blade can be used to create the split **1310** in the first support leg **1306** and the split **1312** in the second support leg **1308**. As a next step, a sealant **1314**, **1316** can be applied to the support legs **1306**, **1308** to re-seal each split **1310**, **1312** and cover the outer surfaces of the support legs **1306**, **1308**. The splitting and then application of sealant **1314**, **1316** provides improved flexibility to the spacer compared to before the support leg **1306**, **1308** was split. One example of a sealant **1314**, **1316** that can be used is HL-5160 available from H.B. Fuller. Other sealants described herein can also be used in some embodiments.

In one embodiment, the sealant **1314**, **1316** is applied during the manufacturing process of the spacer **1300** and then the spacer **1300** is reeled onto a spool for storage until the window units or glazing units are manufactured. At the time that the glazing units are manufactured, such as unit **1302**, a second sealant **1318**, **1320** is applied in the sealant channels as shown in FIG. **15**. This approach results in a reduced volume of the second sealant **1318**, **1320** applied at the time of manufacturing the glazing units, due to the fact that some of the volume of the sealant cavity is occupied by the first sealant **1314**, **1316**. A sealant such as PIB is used in one embodiment for the second sealant **1318**, **1320** and forms a good bond to the HL-5160. Other sealants described herein can also be used in some embodiments as the second sealant **1318**, **1320**. The approach of applying a first sealant **1314**, **1316** at the time of manufacturing the spacer and a second sealant **1318**, **1320** at the time of manufacturing the window assembly allows more flexibility in the choice of the first sealant, since more curing time will be possible for the first sealant before it is incorporated into a window unit in one embodiment. The first sealant **1314**, **1316** and second sealant **1318**, **1320** may be different sealant compositions in one embodiment. The first sealant **1314**, **1316** and second sealant **1318**, **1320** may be the same sealant compositions in one embodiment.

In some embodiments, the filler described in the various embodiments is a deformable material. In some embodiments, filler is a desiccant or includes a desiccant that acts to remove moisture from the first air space and the second air space. Desiccants include molecular sieve and silica gel type desiccants. One example of a desiccant is a beaded desiccant, such as PHONOSORB® molecular sieve beads manufactured by W. R. Grace & Co. of Columbia, Md. If desired, an adhesive is used to attach beaded desiccant within the spacer. Other options for incorporating a desiccant into a spacer are described in U.S. Provisional Application 61/716,861, filed on Oct. 22, 2012 and entitled, "SPACER HAVING A DESICCANT" and in the other related applications incorporated by reference herein.

In some embodiments, the filler provides support to the elongate strips of the spacer. In embodiments that include filler, the filler occupies an interior cavity or interior space, or multiple interior cavities or interior spaces. The presence of the filler can reduce thermal transfer through the elongate strips. In some embodiments, the filler is a matrix desiccant material that not only acts to provide structural support between the elongate strips, but also removes moisture from the interior spaces of the window assembly.

12

Examples of a filler material include adhesive, foam, putty, resin, silicone rubber, or other materials. Some filler materials are a desiccant or include a desiccant, such as a matrix material. Matrix material includes desiccant and other filler material. Examples of matrix desiccants include those manufactured by W.R. Grace & Co. and H.B. Fuller Corporation. In some embodiments a beaded desiccant is combined with another filler material.

The elongate strips described in the spacer embodiments herein are typically long and thin strips of a solid material, such as a metal or plastic. In one embodiment, the elongate strips are formed from material with repeating undulations, as will be further described herein.

An example of a suitable metal for the elongate strips is stainless steel. Other materials can also be used for the elongate strips. An example of a suitable plastic is a thermoplastic polymer, such as polyethylene terephthalate. In some embodiments, a material with low or no permeability is used. Some embodiments include a material having a low thermal conductivity. In at least one embodiment, an outer elongate strip is constructed of a different material than the inner elongate strip or strips. In other embodiments, the elongate strips are constructed of the same or substantially similar materials.

In one embodiment, the thickness of the material of the elongate strip is 0.003 inch (0.076 mm) or less. In another embodiment, the thickness of the material is 0.0025 inch (0.063 mm) or less. In one embodiment, the thickness of the material is 0.0015 inch (0.038 mm) or more. In one embodiment, the thickness of the material is 0.001 inch (0.025 mm) or more. In one embodiment, the material thickness is about 0.002 inch (0.05 mm) or less.

In one embodiment, the thickness of the material of the elongate strip is 0.002 inch (0.05 mm) or more. In one embodiment, the material thickness is 0.003 inch (0.076 mm) or more. In one embodiment, the material thickness is 0.004 inch (0.10 mm) or more. In one embodiment, the material thickness is 0.005 inch (0.13 mm) or more. In one embodiment, the material of the elongate strip is 0.006 inch (0.15 mm) or less. In some embodiments, the material of at least one of the elongate strips is stainless steel and the material has one of the thickness dimensions described herein.

On their own, the elongate strips are generally flexible, including both bending and torsional flexibility. In some embodiments, bending flexibility allows the resulting spacer to be bent to form non-linear shapes (e.g., curves). Bending and torsional flexibility also allows for ease of window manufacturing. Such flexibility includes either elastic or plastic deformation such that the elongate strips do not fracture during installation into a window assembly. In one embodiment, the elongate strips are made of metal, for example stainless steel, and the window spacer is at least partially flexible. In some embodiments, the elongate strips are substantially rigid. In some embodiments, the elongate strips are flexible, but the resulting spacer is substantially rigid. In some embodiments, the elongate strips act to protect a filler from ultraviolet radiation.

In many of the embodiments, one of more of the elongate strips in a spacer have an undulating shape. In some embodiments, the elongate strips are formed of a metal ribbon, such as stainless steel, which can then be bent into the undulating shape. One of the benefits of the undulating shape is that the flexibility of the elongate strips is increased, including bending and torsional flexibility. The undulating shape resists permanent deformation, such as kinks and fractures. This allows the elongate strips to be more easily handled during manufacturing without damaging them. The undulating

13

shape can also increase the structural stability of the elongate strips to improve the ability of spacer to withstand compressive and torsional loads. In addition, the undulating elongate strip will conform to the shape that it surrounds. Around corners, the outer undulating elongate strip will be under tension, while the inner undulating elongate strip will be under compression in some embodiments. As a result, it is easier to execute shaping of the spacer around an object such as a pane of glass. The use of undulations on the elongate strips allows the use of much thinner material than if material without undulations were used since the undulating material is more resistive to compressive forces and provides a larger surface area at its edge for bonding to the glass via the sealant or adhesive. As a result of the thinner material, much better thermal properties are observed in the resulting window assembly because less material in the spacer results in less material available to conduct heat. In addition, the increased surface area distributes forces present at the intersection of an edge of the elongate strip and a surface of the one or more sheets to reduce the chance of breaking, cracking or otherwise damaging the sheet at the location of contact.

Some possible embodiments of the undulating shape of the elongate strips include sinusoidal, arcuate, square, rectangular, triangular, and other desired shapes. The shape of the undulating strip can be a relatively consistent waveform having a peak-to-peak amplitude A , as shown in FIG. 3, which can also be referred to as the overall thickness of the elongate strip **150**, **160**, which is distinguished from the thickness of the material itself. The shape of the undulating strip can also have a relatively consistent peak-to-peak period, T as shown in FIG. 3. In some embodiments, the overall thickness A of the first elongate strip **150** and the second elongate strip **160** is about 0.005 inch (0.13 mm) or more, about 0.1 inch (2.5 mm) or less, about 0.02 inch (0.5 mm) or more, about 0.04 inch (1 mm) or less, about 0.01 inches (0.25 mm) or more, about 0.02 inches (0.5 mm) or less, and 0.012 inch (0.3 mm) in one embodiment.

In one embodiment, the peak-to-peak period of the undulations in the first and second elongate strips **150**, **160** is 0.012 inch (0.3 mm) or more. In some embodiments, the peak-to-peak period of the undulations is 0.01 inch (2.5 mm) or less, 0.05 inch (1.27 mm) or less, or 0.036 inch (0.91 mm). Larger waveforms can be used in other embodiments. Other embodiments can include other dimensions.

The dimensions of the peak-to-peak period and peak-to-peak amplitude of the second elongate strip impact the performance and shape of the spacer around corners. Combinations of the minimum values for the amplitude and period described herein enable the formation of a corner without distorting or breaking the second elongate strip. In one embodiment, a peak-to-peak period is 0.012 inch (0.3 mm) or more and the amplitude is 0.005 inch (0.13 mm) or more. In one embodiment, a peak-to-peak period is 0.012 inch (0.3 mm) or more and the amplitude is 0.01 inches (0.25 mm) or more.

Some embodiments of the first elongate strip **150** and the second elongate strip **160** are formed of materials other than metals, and can be formed by more appropriate processes, such as molding. Note that while the Figures show elongate strips having similar undulations, it is contemplated that one elongate strip in a spacer may have an undulating shape that is much larger than the undulating shape of another elongate strip. Another possible embodiment includes a flat elongate strip without undulations combined with an elongate strip with an undulating shape. Other combinations and arrangements are also possible.

14

The elongate strips in a particular spacer may each have an undulating shape that extends across the width of each strip, in some embodiments, or may have a portion of planar, non-undulating material in the center of each strip.

Referring back, for example, to FIG. 1, the first sheet **110**, the second sheet **120** and the intermediate sheet **130** are generally made of a material that allows at least some light to pass through. Typically, first sheet **110**, second sheet **120** and intermediate sheet **130** are made of a substantially planar, transparent material, such as glass, plastic, or other suitable materials. Alternatively, a translucent or semi-transparent material is used, such as etched, stained, or tinted glass or plastic. It is also possible for first sheet **110**, second sheet **120** and intermediate sheet **130** to be opaque, such as decorative opaque sheets. In some embodiments the first sheet **110**, second sheet **120** and intermediate sheet **130** are all the same type material. In other embodiments, the first sheet **110**, second sheet **120** and intermediate sheet **130** are different types of materials. In other embodiments, the first sheet **110** and the second sheet **120** are the same material, while the intermediate sheet **130** is a different material. In one embodiment, the intermediate sheet includes plastic and the first and second sheets include glass. In one particular embodiment, the intermediate sheet **130** has a smaller thickness than the first sheet **110** and the second sheet **120**, although other configurations are possible. In a variety of embodiment, there can be multiple intermediate sheets. In at least one embodiment, there are two intermediate sheets.

When the window assembly **100** is assembled, a first air space **180** is defined between the first sheet **110** and the intermediate sheet **130**, and a second air space **190** is defined between the second sheet **120** and the intermediate sheet **130**. In embodiments where there are multiple intermediate sheets, additional air spaces will be defined.

When the window assembly **100** is fully assembled, a gas is sealed within a first air space **180**, defined between the first sheet **110** and the intermediate sheet **130**, and a second air space **190**, defined between the second sheet **120** and the intermediate sheet **130**. In embodiments where there are multiple intermediate sheets, additional air spaces will be defined. In some embodiments, the gas is air. In some embodiments, the gas includes oxygen, carbon dioxide, nitrogen, or other gases. Yet other embodiments include an inert gas, such as helium, neon or a noble gas such as krypton, argon, xenon and the like. Combinations of these or other gases are used in other embodiments. In the embodiment of FIG. 1, the intermediate sheet **130** is positioned to be approximately equidistant from the first sheet **110** and the second sheet **120**, so the width of the first air space **180** is approximately equal to the size of the second air space **190**. However, other configurations with differently-sized air spaces are also possible.

Many different options are available for the particular width of the first air space and the second air space, as set forth in the chart below. In some embodiments, the width is about $\frac{1}{8}$ inch (3.2 mm) or more, about $\frac{1}{4}$ inch (6.3 mm) or more, and about $\frac{3}{8}$ inch (9.5 mm) or more. In some embodiments, the width is about $\frac{1}{2}$ inches (12.7 mm) or less, about $1\frac{1}{2}$ inch (3.8 cm) or less, about $1\frac{1}{4}$ inch (3.2 cm) or less and about 1 inch (2.5 cm) or less. In some embodiments, the width is about $\frac{1}{4}$ inch (6.3 mm), about $\frac{3}{8}$ inch (9.5 mm), about $\frac{1}{2}$ inch (12.7 mm) and about $\frac{5}{8}$ inch (15.9 mm). In some embodiments, the width ranges from $\frac{1}{4}$ inch to $\frac{1}{2}$ inch (6.3 mm to 12.7 mm).

In some embodiments, the structure of the spacer, window assembly or both results in fluid communication between the two air spaces. In some embodiments, sealant is present at the

15

outer perimeter of intermediary sheet **130** only intermittently. For example, the sealant **179** may be present along the outer perimeter of the intermediate sheet **130** for six inches, and then absent for six inches, then present for six inches, and so on. Other dimensions describing the intervals for the sealant presence are possible. In this type of configuration, air can pass between the first and second air spaces around the outer perimeter of the intermediate sheet at the locations where no sealant is present.

In one configuration, small openings are present in the intermediate sheet **130** to allow fluid communication between the two air spaces. The small openings are located near the outer perimeter but not overlapping with the sealant.

In some embodiments, the two inner elongate strips **150**, **151** or single inner elongate strip of the spacer defines a plurality of apertures **152**. Apertures **152** allow gas and moisture to pass through the inner elongate strip or strips **150**, **151**. As a result, moisture located within the first air space **180** and the second air space **190** is allowed to pass through the spacer where it is removed by desiccant in the filler.

Another consequence of the first and second spaces being in fluid communication is that the two air-tight seals instead of four air-tight seals are required to maintain the isolation of the first and second spaces from the exterior atmosphere. As a result, there are half as many potential points of failure in the sealing structure. In addition, the quantity of sealant or adhesive and filler material is reduced.

Also, wind load is transferred directly from the first sheet of material to the second sheet of material in constructions where there is fluid communication between the first and second air spaces. In contrast, in a triple pane construction where the first and second spaces are sealed from each other, the wind load is transferred from the first sheet to the intermediate sheet and then to the second sheet. As a result, the intermediate sheet needs to be mechanically capable of bearing the wind load in such a construction. In contrast, in embodiments where there is fluid communication between the first and second air spaces, the intermediate sheet can be constructed from a thinner material and using different material than the first and second sheets, since the intermediate sheet will not need to withstand wind load.

In one embodiment, gilling may be used to form and define the apertures **152**. Generally, "gilling" refers to the introduction of a plurality of discontinuous slits on the surface of the elongate strip prior to forming the undulations of the elongate strip. One manner of introducing the plurality of discontinuous slits on the elongate strip is by passing the elongate strip through a pair of rollers, where at least one roller defines a plurality of discontinuous protrusions and a mating roller defines a plurality of discontinuous mating receptacles. After the introduction of the plurality of discontinuous slits to an elongate strip, undulations can be formed in the elongate strip. In one embodiment the length of each slit is approximately 0.125 inches (3.17 mm) in length. In one embodiment, the apertures are elongate slits.

In one example, the apertures are circular openings with a diameter in a range from about 0.002 inches (0.051 mm) to about 0.050 inches (1.27 mm). In one example, apertures **152** have a diameter of 0.030 inch (0.76 mm) and in another example, the apertures **152** have a diameter of 0.015 inch (0.38 mm). In various embodiments, the apertures **152** have a center-to-center spacing of 0.002 inch (0.051 mm) or more, 1 inch (25.4 mm) or less, and for example 0.060 inch (1.52 mm). Apertures are made by any suitable method, such as cutting, punching, drilling, laser forming, or the like. In another

16

embodiment, apertures are used for registration of the intermediate sheet. In yet another embodiment, apertures provide reduced thermal transfer.

Some embodiments of spacer are made according to the following process. Embodiments with support legs will now be discussed. Support legs or structural elements are formed and positioned between elongate strips with a die component, in some embodiments. In one possible embodiment, each elongate strip that makes up the spacer is passed through an elongate strip guide in the die. The guides orient the elongate strips in a generally parallel and facing arrangement and space them a desired distance apart. An extrusion die is arranged near the guide and between elongate strips. As the elongate strips pass through the guide, a support leg material and/or structural element is extruded into a mold between elongate strips. Extrusion typically involves heating the material and using a hydraulic, or other, press to push the material through the extrusion die. The guide also presses the extruded support legs or structural element against interior surfaces of elongate strips, such that the support legs conform to the undulating shape and are connected to elongate strips.

In one embodiment, before the elongate strips are joined and the support legs and/or structural element is formed, filler is positioned on at least one of the elongate strips. In one embodiment, the filler is not placed at the corner locations. An automated control component can be used to control the filler application equipment to accomplish this placement. In one embodiment, filler is inserted between the elongate strips, and between the support legs during the process of forming the spacer. In one embodiment, the filler is inserted between the elongate strips after the sidewalls and/or structural element has been formed to join the elongate strips.

After formation of the spacer, in some embodiments the spacer is sufficiently flexible that it can be wrapped around and stored on a spool without damaging the spacer. In various embodiments, the spacer can be wrapped around a spool core having a diameter of 18 inches or more, 12 inches or more, 10 inches or more, 6 inches or more, 4 inches or more, and 3.5 inches or more without being damaged. Examples of damage include the separation of one or more of the support legs from one or more of the elongate strips.

In some embodiments, the spacer is sufficiently twistable that a length of about 28 inches of spacer can be twisted by 180 degrees in a positive direction and 270 degrees in a negative direction without being damaged. In some embodiments, the spacer is sufficiently twistable that a length of about 28 inches of spacer can be twisted by about 90 degrees in a positive direction and about 180 degrees in a negative direction without being damaged. In some embodiments, the spacer is sufficiently twistable that a length of about 9 inches of spacer can be twisted by about 90 degrees while one end is held fixed without being damaged.

The sheets of material used in windows can be a variety of shapes and may have corners. In multiple embodiments the sheets are rectangular and have four ninety degree angles. As such, the spacers can be configured to be positioned adjacent to the perimeter of a sheet including accommodating the shape of the corners. Corner notches, an example of which is illustrated in FIG. 3 at corner notch **300**, can be defined along the length of the spacer. Each corner notch **300** is positioned to correspond with the location of the corners of the sheets of material. The corner notches **300** are generally V-shaped. Each notch **300** extends through the inner elongate strips or strip and any support legs or structural element. In one embodiment, the notch **300** defines an angle that is about 90 degrees.

17

The corner notching or corner registration process allows the formation of a true corner, either ninety degrees or another angle, by the inner elongate strip or strips of the spacer and therefore allows the use of a true ninety degree corner on the intermediary sheet of material such as glass. As a result, it is not necessary to create a radius at each corner of the sheet, which is significantly more efficient in the glass cutting process than creating a radius at corners. At the corners of the window assembly, the outer elongate strip is bent and forms a radius in some embodiments. In various embodiments, the radius of the outer elongate strip after being applied around a corner of a sheet is about 0.25 inch (6.35 mm), about 0.1 inch (2.54 mm) or more or about 0.5 inch (12.7 mm) or less. An advantage of this configuration is that the equipment that applies sealant or adhesive is not required to come to a stop, but can simply slow down, as it travels around the corners of the window assembly.

In at least one embodiment, the spacer is fed into a corner registration mechanism to define the corner notches. The corner registration mechanism is adapted to score the spacer at defined locations. In the subject embodiment, the corner registration mechanism is adapted to cut notches into the spacer at given intervals. In the notching process, a portion of the first elongate strip is removed and a portion of any support legs or structural element is removed at each notch location. In one embodiment, the system includes an automated control system that is programmed with the dimensions of the spacers that are required for making the next window assemblies, and is operatively coupled to the components of the assembly system. The automated control component can thereby calculate the specific locations in the roll where particular spacer lengths will begin and end, and the corner locations for those spacers. The intervals between the adjacent notches are chosen based on the dimensions of the sheets. As the spacer is fed through the corner registration mechanism, the notches are cut by the corner registration mechanism at the corner locations.

After formation of the spacer, and optionally after unwinding from a spool and cutting of the corner notches, the spacer can be cut to an appropriate length, such as sufficiently long to be positioned at the entire perimeter of a window assembly. Adhesive or sealant is deposited on a surface of the spacer that is configured to receive the edge of an intermediate sheet. Adhesive or sealant is also placed in the sealant channels at the same time, in some embodiments. An edge of the intermediate sheet is brought into contact with the adhesive on the receiving surface of the first elongate strip, and the spacer is wrapped around the perimeter of the intermediate sheet. A first sheet and second sheet are coupled to the adhesive disposed along each respective side of the spacer. Further details and options regarding embodiments of the assembly process and applicator apparatus are described in U.S. patent application Ser. No. 13/157,866, "WINDOW SPACER APPLICATOR", filed Jun. 10, 2011 and in U.S. Provisional Application No. 61/716,871, titled "VERTICAL LINE MANUFACTURING SYSTEM AND METHOD," filed on Oct. 22, 2012, both of which are incorporated herein in their entireties.

FIGS. 16 and 17 illustrate a spacer set conveyor 1500 that can be used in some embodiments in conjunction with other equipment, such as a spacer applicator, to bring an intermediate pane into contact with the spacer. This equipment facilitates applying a spacer to an intermediate pane without the use of vacuum cups or pads contacting the major surfaces of the intermediate pane. The spacer set conveyor 1500 includes a major surface 1502 upon which a pane 1504 may be supported during a manufacturing process. The spacer set con-

18

veyor 1500 also includes a pane conveyor 1506 that supports a bottom edge 1508 of a pane during part of a manufacturing process. The major surface 1502 defines many openings 1514 for providing a vacuum that is capable of holding the pane 1504 against the major surface 1502 as the pane conveyor 1506 drops away from the bottom edge 1508 of the pane 1504. The movement of the pane conveyor 1506 away from the bottom edge 1508 of the pane 1504 provides access to bottom edge 1508 of the pane 1504. The major surface 1502 also defines a center groove or opening 1510. The opening 1510 is large enough to allow a small gripper element on a spacer applicator to grip a top edge 1512 of the pane 1504. The opening 1510 is small enough that when a pane 1504 slides along the major surface 1502 its movement is not disrupted by the opening 1510. At the same time that a gripper contacts the top edge 1512 of the pane 1504, additional gripper elements of a spacer applicator can grip the bottom edge 1508 of the pane 1504. As a result, the opening 1510 provides a mechanism for gripping and manipulating the pane 1504 without the use of suction cups or suction pads contacting one of the major surfaces of the pane 1504. Suction cups or suction pads can leave marks on the pane and so the spacer set conveyor provides an advantage in the manufacturing process.

FIGS. 18-20 illustrate examples of pane retention elements that may be used in some embodiments of a spacer applicator that is used in conjunction with the spacer set conveyor of FIGS. 16-17. FIG. 18 shows a center pane retention element 1700 which includes a gripper 1702 and can be positioned at a center of an edge of a pane. The gripper 1702 defines a groove 1704 that can contact an edge of a pane. A plate element 1706 will rest against a major surface of the pane when the gripper 1702 is engaged with the edge of the glass. The center gripper 1702 is sized so that it will fit within the opening 1510 defined in the major surface 1502 spacer set conveyor 1500 (See FIGS. 16 and 17).

FIG. 19 shows a first corner pane retention element 1800 that can be positioned at a corner of a pane, which includes grippers 1802 and 1804 at 90 degree angles to each other. Each gripper 1802, 1804 defines a groove 1806, 1808 for accommodating, gripping and contacting edges of the pane. A third gripper 1809 is present near the corner of the pane retention element 1800 and can be used to further grip the pane or for other retention purposes during the manufacturing process, such as pressing an end tab of a spacer into the proper position. A plate element 1810 will rest against a major surface of the pane when the two grippers 1802, 1804 are contacting the pane.

FIG. 20 shows a second corner pane retention element 1900 that can also be positioned at a corner of a pane and includes grippers 1902 and 1904 at 90 degree angles to each other. Each gripper 1902, 1904 defines a groove 1906, 1908 for contacting edges of the pane. A plate element 1910 will rest against a major surface of the pane when the two grippers 1902, 1904 are contacting the pane. In one embodiment of a spacer applicator device, one first corner pane retention element 1800 is provided, three second corner pane retention elements 1900 are provided, and four center pane retention elements 1700 are provided.

In one embodiment, each of the pane retention elements 1700, 1800, 1900 can be converted to spacer retention elements that grip a spacer and form a spacer into a spacer frame, then apply a spacer frame to a pane of glass in the process of forming a dual pane window unit. This conversion can occur by replacing the plate elements 1706, 1810, 1910 with differ-

19

ent plate elements that are configured to allow a spacer element to be gripped between the grippers and the different plate elements.

An example of a system and method for forming a window assembly has been described, but those of skill in the art will be aware of many options and alternatives to the equipment and method steps described that can be used.

Various embodiments are described in detail with reference to the drawings, wherein like reference numerals represent like parts and assemblies throughout the several views. Reference to various embodiments does not limit the scope of the claims attached hereto. Additionally, any examples set forth in this specification are not intended to be limiting and merely set forth some of the many possible embodiments for the appended claims.

We claim:

1. A window unit comprising:

an intermediate pane, the intermediate pane being disposed between first and second outer panes of the window unit; an outer elongate strip having (i) a length corresponding to a distance between inner surfaces of the outer panes, (ii) a first surface, and (iii) a second surface contacting and supporting the intermediate pane;

first and second inner elongate strips, each having a first surface and a second surface, the inner elongate strips arranged so that each of the first surfaces of the inner elongate strips are spaced from the second surface of the outer elongate strip towards an interior of the window unit, the inner elongate strips being spaced from each other to form an elongate intermediate pane gap;

a first outer support leg extending between the outer elongate strip and the first inner elongate strip;

a second outer support leg extending between the outer elongate strip and the second inner elongate strip;

a first inner support leg extending between the outer elongate strip and the first inner elongate strip, the first inner support leg positioned between the two outer support legs; and

a second inner support leg extending between the outer elongate strip and the second inner elongate strip, the second inner support leg positioned between the two outer support legs,

wherein the outer elongate strip and the first inner elongate strip each extend a first distance from the first outer support leg to the inner surface of the first outer pane, and wherein the outer elongate strip and the second inner elongate strip each extend a second distance from the second outer support leg to the inner surface of the second outer pane.

2. The window unit of claim **1** wherein the inner support legs are positioned at a non-perpendicular angle to the outer elongate strip.

3. The window unit of claim **1** wherein the first and second outer support leg are spaced from the outer edges of the elongate strips.

4. The window unit of claim **1** wherein the support legs are formed of a different material than the elongate strips.

5. The window unit of claim **1** wherein the support legs are nylon.

6. The window unit of claim **1** wherein the elongate strips are metal.

7. The window unit of claim **1** wherein the elongate strips have an undulating shape.

8. The window unit of claim **1** further comprising at least one filler arranged between the outer elongate strip and the inner elongate strips, the filler including a desiccant.

20

9. The window unit of claim **1** further comprising an elongate gasket disposed between the first inner elongate strip and the second inner elongate strip, wherein the elongate gasket further defines the intermediate pane gap.

10. A window unit comprising:

a first pane, a second pane, and an intermediate pane disposed between the first pane and the second pane;

a spacer comprising:

an outer elongate strip (i) extending between inner surfaces of the first and second panes, (ii) having a first surface, and (iii) having a second surface contacting and supporting the intermediate pane;

first and second inner elongate strips, each having a first surface and a second surface, the inner elongate strips arranged so that each of the first surfaces of the inner elongate strips are spaced from the second surface of the outer elongate strip towards an interior of the window unit, the inner elongate strips being spaced from each other to form an elongate intermediate pane gap;

a first outer support leg extending between the outer elongate strip and the first inner elongate strip;

a second outer support leg extending between the outer elongate strip and the second inner elongate strip;

a first inner support leg extending between the outer elongate strip and the first inner elongate strip, the first inner support leg positioned between the two outer support legs; and

a second inner support leg extending between the outer elongate strip and the second inner elongate strip, the second inner support leg positioned between the two outer support legs,

wherein the spacer defines a first sealant cavity comprising sealant between the first pane and the first outer support leg and a second sealant cavity comprising sealant between the second pane and the second outer support leg,

wherein the outer elongate strip and the first inner elongate strip each extend a first distance from the first outer support leg to the inner surface of the first pane, and wherein the outer elongate strip and the second inner elongate strip each extend a second distance from the second outer support leg to the inner surface of the second pane.

11. A window unit comprising:

a first pane, a second pane, and an intermediate pane disposed between the first pane and the second pane;

a spacer comprising:

an outer elongate strip extending from an inner surface of the first pane to an inner surface of the second pane and contacting and supporting the intermediate pane; first inner elongate strip extending from the first pane to the intermediate pane;

a second inner elongate strip extending from the intermediate pane to the second pane;

a first support leg extending between the outer elongate strip and the first inner elongate strip; and

a second support leg extending between the outer elongate strip and the second inner elongate strip,

wherein the outer elongate strip and the first inner elongate strip each extend a first distance from the first support leg to the inner surface of the first pane, and wherein the outer elongate strip and the second inner elongate strip each extend a second distance from second support leg to the inner surface of the second pane.

12. The window unit of claim **11**, further comprising an elongate gasket disposed between the first inner elongate strip

21

and the second inner elongate strip, wherein the elongate gasket frictionally receives the intermediate pane.

13. The window unit of claim 11, further comprising:

a third support leg extending between the outer elongate strip and the first inner elongate strip and arranged between the first support leg and the intermediate pane; and

a fourth support leg extending between the outer elongate strip and the second inner elongate strip and arranged between the second support leg and the intermediate pane.

14. The window unit of claim 11, wherein the outer elongate strip, the first inner elongate strip, and the second inner elongate strip have an undulating shape.

15. The window unit of claim 13, wherein:

the first support leg, the outer elongate strip and the first inner elongate strip define a first sealant cavity having a sealant disposed therein, wherein the sealant sealably contacts the first pane; and

the second support leg, the outer elongate strip and the second inner elongate strip define a second sealant cavity having the sealant disposed therein, wherein the sealant sealably contacts the second pane.

16. The window unit of claim 2, wherein the first and second inner support legs are arranged at the non-perpendicular angle with respect to the outer elongate strip such that first

22

ends of the first and second inner support legs proximate the outer elongate strip are closer to the intermediate pane than second ends of the first and second inner support legs proximate the first and second inner elongate strips, respectively.

17. The window unit of claim 16, wherein the non-perpendicular angle of the first and second inner support legs with respect to the outer elongate strip provides for easier alignment of the intermediate pane within the elongate intermediate pane gap of the spacer.

18. The window unit of claim 15, wherein the third and fourth support legs, the first and second inner elongate strips, and the outer elongate strip define an intermediate sealant cavity having a sealant disposed therein, wherein the sealant sealably contacts the intermediate pane.

19. The window unit of claim 18, wherein:

the first and third support legs, the first inner elongate strip, and the outer elongate strip define a first filler cavity having a filler disposed therein, the filler comprising a desiccant; and

the second and fourth support legs, the second inner elongate strip, and the outer elongate strip define a second filler cavity having the filler disposed therein.

20. The window unit of claim 11, further comprising a thin layer of sealant arranged between the intermediate pane and the outer elongate strip.

* * * * *